

Xiaolei

Wireless Module


Model: CG-T



Manual

www.xiaolei.com.cn

Application Diagram

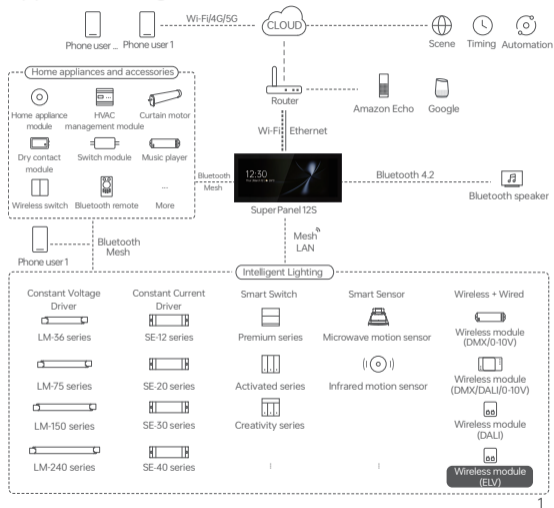

Product Features


- Small size and light weight. The housing is made from SAMSUNG/COVESTRO's V0 flame retardant PC materials.
- Bluetooth 5.0 SIG Mesh with high networking capacity provides reliable and stable performance.
- Convert Bluetooth to ELV signal; Merging the wireless and wired protocol allows more expanded applications.
- Control it on iOS or Android devices via Bluetooth.
- Support online upgrade. With ultra-low power consumption, it can be continuously powered off and on to reset it to factory defaults.
- Support the execution of local scenes without the Internet or a gateway, which is faster and more stable.
- Set the fade time, power-on lighting status, etc.
- Work with a smart gateway to achieve voice control, cloud scenes and automation.

Technical Specs

Model	CG-T
Wireless Protocol Type	Bluetooth 5.0 SIG Mesh
Output Signal	ELV
Input Voltage	100-240V~
Operating Current	Max.1.5A
Output Power	Incandescent lamp or high-pressure halogen lamp: Max.110W (AC 120V), Max.220W (AC 220V) Dimmable LED: Max.80W (AC 120V), Max.180W (AC 220V)
Inrush Current in Loads	Max.45A*
Working Temperature	-20°C~50°C
Product Size(L×W×H)	L52×W59×H20(mm)
Package Size(L×W×H)	L86×W86×H25(mm)
Weight (G.W.)	40g


* The total inrush current of matching products on the output side should be ≤45A, so the matching products have a limited number. When the inrush current of one certain brand's 10W driver is 20A and three are connected into the same circuit, the assumed actual inrush current of this circuit reaches 43A so the number of connected drivers should be 3 or less than 3. The inrush current varies between different brands and between different power. Therefore, when multiple products are connected together, the actual inrush current of the circuit shall prevail and should not exceed 45A otherwise the products might be damaged.

Product Images

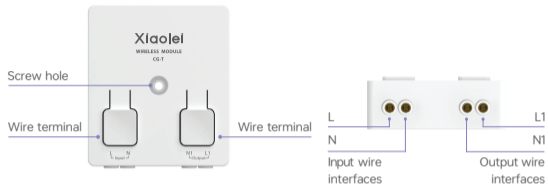


Product Size

Unit: mm

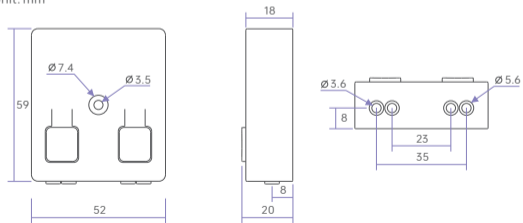


Wiring Diagram


APP + Super Panel 12S + Wireless module + Driver

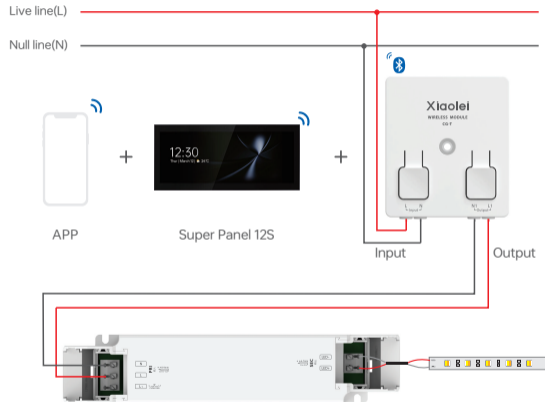

Wireless module + Multiple Phase cut power amplifiers + Multiple Phase cut LED drivers

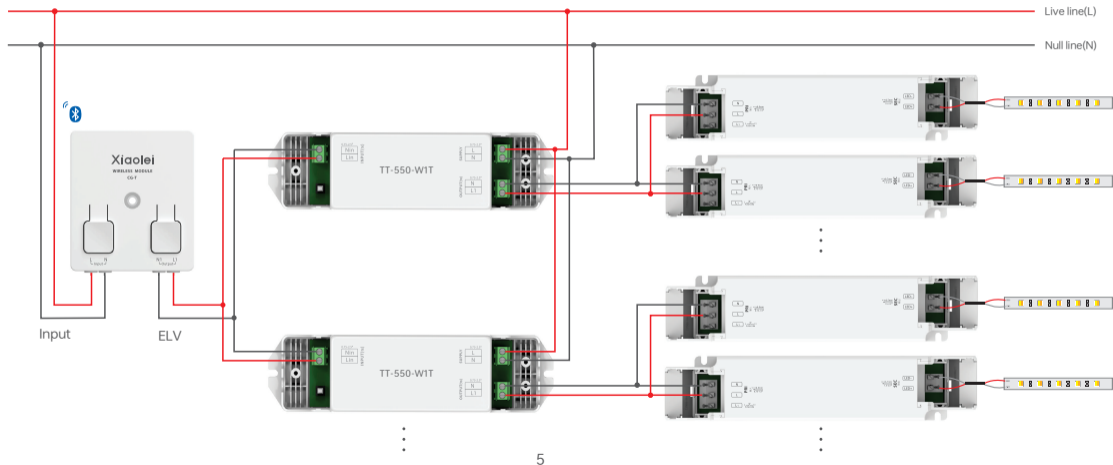

Wire Specifications

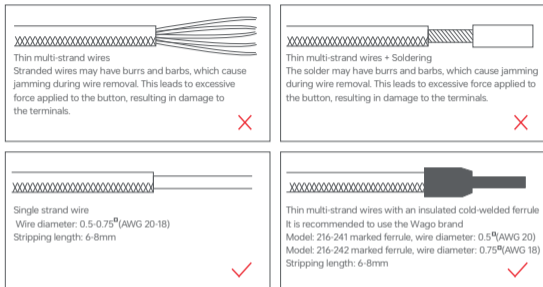

Wire Connection

Connect wires: Turn off the power before connecting wires. Make wires parallel to the wire port, then insert wires into the corresponding terminal until wires are locked.

Release wires: Turn off the power before releasing wires. Press and hold the button on the top and gently pull the wires out.


Attentions:

1. Please connect the wires based on the wire specifications. Otherwise the terminals will be easily damaged if the wire diameter is too big;
2. Press the terminals with proper force and keep it vertically downward.


7

Recommended Applications

1. Wireless control.



2. Both App and remote can control the wireless module after connecting the remote to wireless module via App.



3. Support local scenes that can still run without the Internet or a gateway.



4. Work with a smart gateway to achieve a variety of cloud scenes, cloud-based automation and local automation.



5. More applications of intelligent control are waiting for you to set up.

8

App Operating Instructions


1. Register an account

1.1 Scan the QR code below with your mobile phone and follow the prompts to complete the app installation.



Scan and download the App


1.2 Open the App and log in or register an account



2. Pairing instructions


Create a home if you are a new user. Click “+” icon in the upper right corner and access the “Add device” page. Pick “Smart module” - “Phase cut module” from the list.

Follow the prompts to connect the device to a lamp first, then power it on. Next click “Search via Bluetooth” and follow the prompts to add the device.

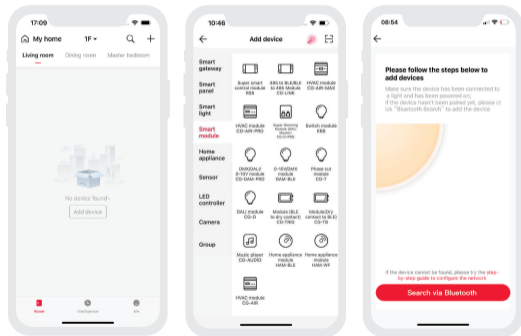

3. Control interface settings

After pairing your device, go to the control interface. You'll be able to achieve your desired lighting effects by changing brightness. Click "Theme" and you'll easily switch to multiple theme lighting effects with one tap. Click "Mode" and the App provides you editable advanced modes. Customize dynamic modes to put you into a more colorful life.

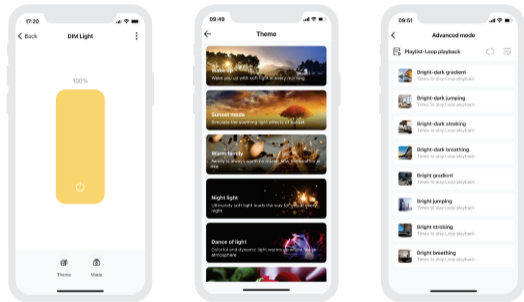

4. Advanced functions

- 4.1 Control the wireless module locally by linking it with a local scene.
- 4.2 Add a smart gateway like Super Panel 6S to achieve a variety of cloud scenes, cloud-based automation and local automation. For details, please view the instructions in the APP.

FAQs

1. What should I do if I fail to search the device via APP?
Please check below:
 - 1.1 Please make sure the device is powered on normally.
 - 1.2 Please keep your mobile phone and device as close as possible. The recommended distance between them is no more than 15 meters.
 - 1.3 Please make sure the device hasn't been added yet. If it has, please reset the device to factory defaults manually.
2. How to reset the device to factory defaults?
Turn it off with the switch. After 5s, turn it on. After 2s, turn it off again. Repeat the same operation 6 times. When the lamp flashes 5 times, reset it to factory defaults successfully.

Attentions

- Products shall be installed by qualified professionals
 - LTECH products are and not lightningproof non-waterproof (special models excepted). Please avoid the sun and rain. When installed outdoors, please ensure they are mounted in a water proof enclosure or in an area equipped with lightning protection devices.
 - Good heat dissipation will prolong the working life of products. Please ensure good ventilation.
 - Please check if the working voltage used complies with the parameter requirements of products.
 - The diameter of wire used must be able to load the light fixtures you connect and ensure the firm wiring.
 - Before you power on products, please make sure all the wiring is correct in case of incorrect connection that causes damage to light fixtures.
 - If a fault occurs, please do not attempt to fix products by yourself. If you have any question, please contact your suppliers.
- * This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our official distributors if you have any question.

Warranty Agreement

Warranty periods from the date of delivery: 5 years.

Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
 - Any artificial damage caused by high voltage, overload, or improper operations.
 - Products with severe physical damage.
 - Damage caused by natural disasters and force majeure.
 - Warranty labels and barcodes have been damaged.
 - No any contract signed by LTECH.
1. Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
 2. LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.



www.xiaolei.com.cn

ZHUHAI LTECH TECHNOLOGY CO., LTD.

No. 183, Shu'an 1st Road, Xiangzhou District,
519060 Zhuhai City, PEOPLE'S REPUBLIC OF CHINA

Xiaolei

蓝牙无线模组


型号: CG-T



使用说明书

www.xiaolei.cn

系统图

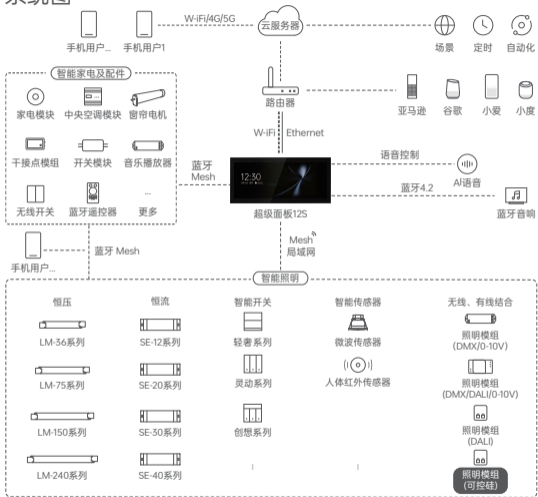

产品介绍


- 体积小、重量轻，外壳采用科思创/三星PC阻燃V0级原料；
- Bluetooth 5.0 SIG Mesh 通信协议，组网能力强，可靠稳定；
- 蓝牙可控硅调光协议，无线与有线结合，扩展灵活；
- 支持IOS和安卓智能设备蓝牙直连控制；
- 支持在线升级功能，具有超低功耗功能，可连续断上电恢复出厂设置；
- 支持本地场景，去网关，断网可控，更快更稳定；
- 可设置缓启动渐变时间、通电后灯光状态等，赋予灯光设计高端品质；
- 可搭配智能网关实现语音控制、云场景、云自动化控制。

技术参数

产品型号	CG-T
无线类型	Bluetooth 5.0 SIG Mesh
输出信号	ELV后沿
输入电压	100-240V~
工作电流	Max.1.5A
输出功率	白炽灯或高压卤素灯:Max.110W (AC 120V), Max.220W (AC 220V) 可调光LED:Max.80W (AC 120V), Max.180W (AC 220V)
负载浪涌电流	Max.45A*
工作温度	-20°C~50°C
产品尺寸	L52×W59×H20(mm)
包装尺寸	L86×W86×H25(mm)
重量(毛重)	40g


* 输出端搭配的产品总浪涌电流应≤45A，需限制接入数量。某品牌10W电源，单台浪涌电流20A，接三台一个回路时，假设实测该回路浪涌电流已达到43A，接入数量应≤3台。因不同品牌、功率、浪涌电流差异，若需多台接入，以实际回路浪涌电流为准，不能超出45A，否则会造成产品损坏。

产品图示

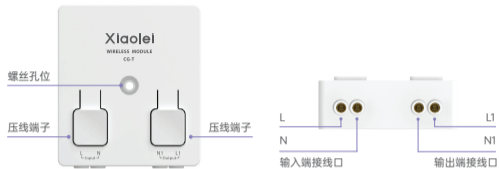


产品尺寸

单位: mm

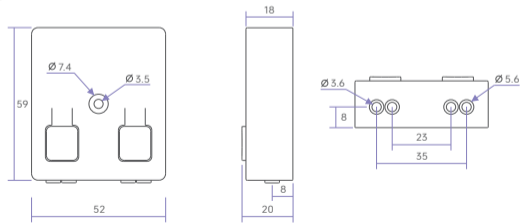


连线图





APP + 超级面板12S + 蓝牙无线模块 + 驱动器

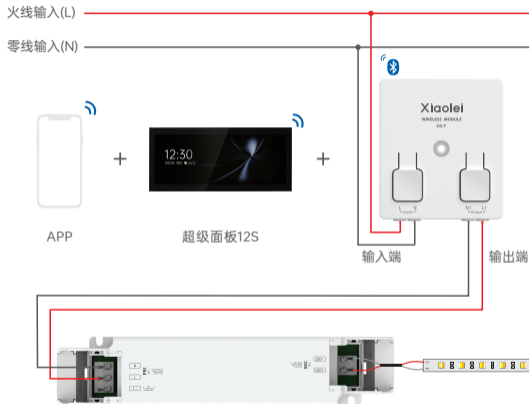

蓝牙无线模块 + 多台可控硅功率放大器 + 多台可控硅调光电源

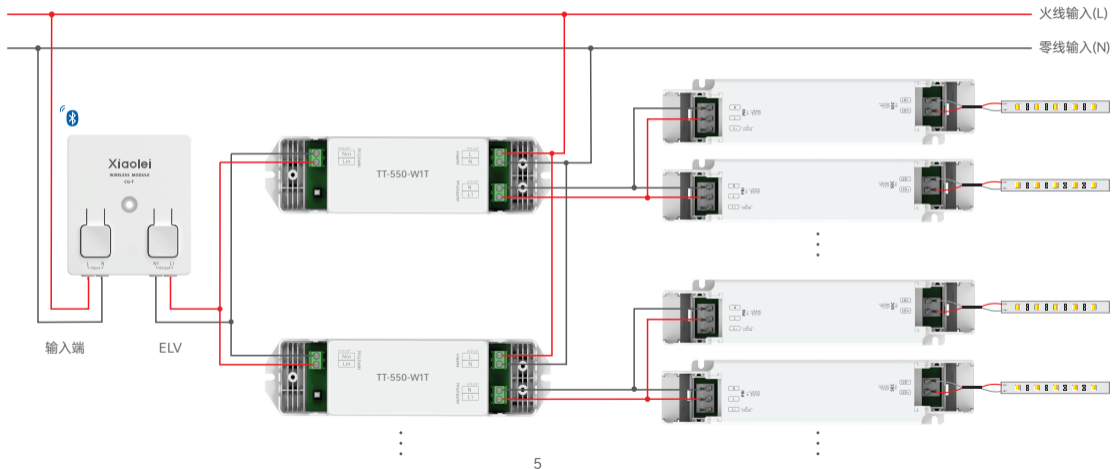

线材要求



接线方式

接线：在断开电源的情况下，将导线平行于接线口，插入相应的端子，直到锁紧即可。

拆线：在断开电源的情况下，按住顶部按钮，将导线轻轻拔出。


注意事项：

1.请严格按照线材要求进行接线，否则线径过大容易损坏端子；

2.按压时，注意力度适中并保持垂直向下。

应用组合

1.无线控制灯具。



2.通过APP设置遥控关联蓝牙无线模组后，可实现APP与遥控两种控制方式控制设备。



3.支持本地场景，去网关，断网可控。



4.搭配智能网关，实现可视化控制，云场景、云自动化、本地自动化联动。



5. ...智能控制，更多应用搭配等您来设置。

APP操作说明

1. 账号注册

1.1 通过手机扫描下方二维码，按提示完成APP安装。




扫码下载APP

1.2 打开APP进行登录/注册操作。



2. 配对操作

新用户创建家庭后，点击右上角“+”进入添加设备列表，选择“智能模块-可控硅模块”，按照界面提示，先将设备连接灯具且接通电源，点击“蓝牙搜索”后，按照提示完成添加设备。

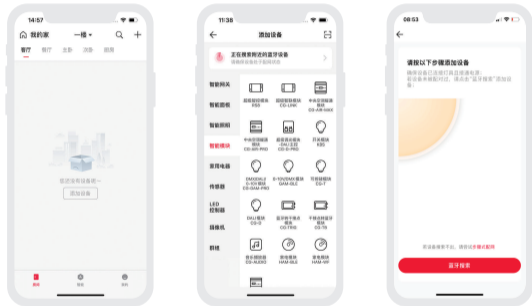

3. 控制界面设置

配对完成后，进入控制界面，可以通过调节亮度达到想要的灯光效果。点击“主题”，进入主题界面，可一键切换多种主题灯光效果。点击“模式”，具有可编辑的高级模式。自定义动态模式，让您的生活更加丰富多彩。



4. 高级功能

4.1 可通过联动本地场景，实现本地化控制；

4.2 可搭配具有网关功能的设备(比如:超级面板6S)实现丰富的云场景、云自动化、本地自动化控制。具体详细请查看APP操作。

常见问题

1. 设备一直搜索不到怎么办？

请检查以下选项：

1.1 确保设备正常通电状态；

1.2 确保手机与设备两者尽量靠近，建议不超过15米；

1.3 确保设备未被添加过，如被添加过，请手动恢复出厂。

2. 如何恢复出厂？

使用开关连续断通电6次（每次断电时间5秒，通电2秒），第六次通电2秒后，灯具闪烁5次，即表示设备已恢复到出厂设置状态。

注意事项

- 请由具有专业资格的人员进行调试安装。
 - 雷特产品（专有型号除外）不能防水防雷，需避免日晒雨淋，如安装在户外，请用防水箱和防雷装置。
 - 良好的散热条件会延长产品的使用寿命，请把产品安装在通风良好的环境。
 - 请检查使用的工作电压是否符合产品的参数要求。
 - 使用的电线直径大小必须能够负载连接的LED灯具，并确保接线牢固。
 - 通电调试前，应确保所有接线正确。
 - 如果发生故障，请勿私自维修；如有疑问，请联系供应商。
- * 本说明书的内容如有变更，恕不另行通知。若内容与您使用的功能有所不同，则以实物为准。如有疑问，欢迎向我司授权的经销商咨询。

保修条例

- 自出厂之日起保修服务期为5年。
- 在保修服务期内出现产品质量问题雷特科技将给予免费修理或更换服务。

非保修条例：

属下列情况不在免费保修或更换服务范围之内：

- 已经超出保修服务期；
- 过高电压、超负载、操作不当等人为造成的损坏；
- 产品外形严重损坏或变形；
- 自然灾害以及人力不可抗拒原因造成的损坏；
- 产品保修标签和产品唯一条形码损坏；
- 无雷特科技签订的合同或发票凭证。

1. 修理或更换是雷特科技对客户的唯一补救措施。雷特科技不承担任何附带引起的损害赔偿责任，除非在适用法律范围之内。
2. 雷特科技享有修正或调整本保修条款的权利，并以书面形式发布为准。



www.xiaolei.cn

珠海雷特科技股份有限公司

珠海市香洲区水岸一路183号