

Intelligent LED Driver (Constant Voltage)

- The housing is made of V0 flame-retardant PC material, sourced from SAMSUNG/COVESTRO.
- Features a tool-free clamshell design with detachable end caps, allowing length adjustment as needed.
- The gradient time, PWM, Power-on Status, etc. can be changed through NFC via the mobile phone APP to achieve the data interaction function of the driver.
- Bluetooth 5.0 SIG Mesh with high networking capability are reliable and stable.
- Support control iOS or Android devices through Bluetooth connection. It is equipped with a soft-start gradually brightening function, making the visual experience more comfortable for the human eye.
- Supports deep dimming from 0~100%, with a minimum dimming level of 0.0001%.
- High-efficiency driver with 93% efficiency, power factor > 0.98, and THD < 6%.
- In compliance with the EU ERP Directive, standby power consumption is below 0.5W.
- Equipped with an advanced thermal management system to protect internal components.
- Includes protections against overheating, overload, short circuit, and open circuit.
- Suitable for Class I / II / III indoor luminaires.
- Designed for a service life exceeding 100,000 hours under normal operating conditions.
- 5-year warranty (Rubycon capacitor).



Flicker-Free
IEEE 1789
Achieve the exemption level.

Dimmable:
1:1000000




Technical Specs

Model	LM-150-24-G1B2F	LM-150-12-G1B2F		
Features	Output Type	Constant Voltage		
	Dimming Interface	Bluetooth 5.0 SIG Mesh		
	Output Feature	Isolation		
	Protection Grade	IP20		
	Insulation Grade	Class II (Suitable for class I /II/III light fixtures)		
OUTPUT	Output Voltage	24V $\overline{=}$	12V $\overline{=}$	
	Output Voltage Range	24V \pm 0.5V $\overline{=}$	12V \pm 0.5V $\overline{=}$	
	Output Current	Max. 6.25A	Max. 12.5A	
	Output Power	Max. 150W		
	Output Power Range	0~150W		
	Strobe Level	High frequency exemption level		
	Dimming Range	0~100%, down to 0.0001%		
	Overload Power Limitation	\geq 102%		
	Ripple	Switch ripple \leq 200mV, noise \leq 500mV	Switch ripple \leq 200mV, noise \leq 800mV	
	PWM Frequency	300-22000Hz		
INPUT	AC Voltage Range	220-240V~		
	DC Voltage Range	220-240V $\overline{=}$ (EMI needs to be evaluated after the luminaire is installed)		
	Frequency	50/60Hz		
	Input Current	Max. 0.75A/230V~		
	Power Factor	PF>0.98/230V~ (at full load)		
	THD	THD<6%@ 230V~ (at full load)		
	Efficiency (Typ.)	93%	92%	
	Standby Power Loss	< 0.5W		
	Inrush Current	Cold start 45.6A(Test twidth=500us tested under 50% Ipeak)/230V~		
	Anti Surge	L-N: 2KV		
Leakage Current	Max. 0.5mA			
ENVIRONMENT	Working Temperature	ta: -20 ~ 50°C tc: 85°C		
	Working Humidity	20 ~ 95%RH, non-condensing		
	Storage Temperature/Humidity	-40 ~ 80°C, 10~95%RH		
	Temperature Coefficient	\pm 0.03%/°C(0-50°C)		
	Vibration	10~500Hz, 2G 12min/1cycle, 72 min for X, Y and Z axes respectively		
PROTECTION	Overload Protection	Shut down the output when rated power \geq 102%, auto recovers		
	Overheat Protection	Intelligently adjust or turn off the output current if the PCB temperature \geq 110°C, and recover automatically		
	Short Circuit Protection	Enter hiccup mode if short circuit occurs, and recover automatically		
	Overvoltage Protection	Shut down the output when no-load voltage \geq 28V, and recover automatically	Shut down the output when no-load voltage \geq 16V, and recover automatically	
	Withstand Voltage	I/P-O/P: 3750V~		
SAFETY & EMC	Insulation Resistance	I/P-O/P: 100M Ω /500VDC/25°C/70%RH		
	SafetyStandards	CCC	China	GB19510.1, GB19510.14, GB19510.213
		TUV	Germany	EN61347-1, EN61347-2-13, EN62493
		CB	CB MEMBER STATES	IEC61347-1, IEC61347-2-13
		CE	European Union	EN61347-1, EN61347-2-13, EN62384
		KC	Korea	KC61347-1, KC61347-2-13
		EAC	Russia	IEC61347-1, IEC61347-2-13
		RCM	Australia	AS 61347-1, AS 61347-2-13
		ENEC	Europe	EN61347-1, EN61347-2-13, EN62384
	EMC Emission	BIS	Europe	EN61347-1, EN61347-2-13, EN62384
		CCC	China	GB/T17743, GB17625.1
		CE	European Union	EN55015, EN61000-3-2, EN61000-3-3, EN61547
		KC	Korea	KN15, KN61547
		EAC	Russia	IEC62493, IEC61547, EH55015
		RCM	Australia	EN55015, EN61000-3-2, EN61000-3-3, EN61547
ErP		Power Consumption	Networked standby	< 0.5W(After shutdown by command)
ErP		No-load power consumption	No no-load mode	
	Flicker/Stroboscopic Effect	IEEEE1789	Meet IEEE 1789 standard/High frequency exemption level	
		CIE SVM	PstLM \leq 1.0, SVM \leq 0.4	
OTHERS	DF	Phase factor	DF \geq 0.9	
	Weight(N.W.)	430g \pm 10g		
	Dimensions	352 \times 43 \times 30mm(L \times W \times H)		

This driver is suitable for connecting to resistor-limited LED fixtures (e.g., LED strips). If connected to fixtures with built-in constant-current ICs, it may generate instantaneous surge currents dozens of times higher, triggering overload protection (hiccup-mode flickering). For such fixtures (e.g., MR16 bulbs, buried lights, wall washers, constant-current rigid strips), please specify during ordering to enable firmware reprogramming.

Product Size

Unit: mm

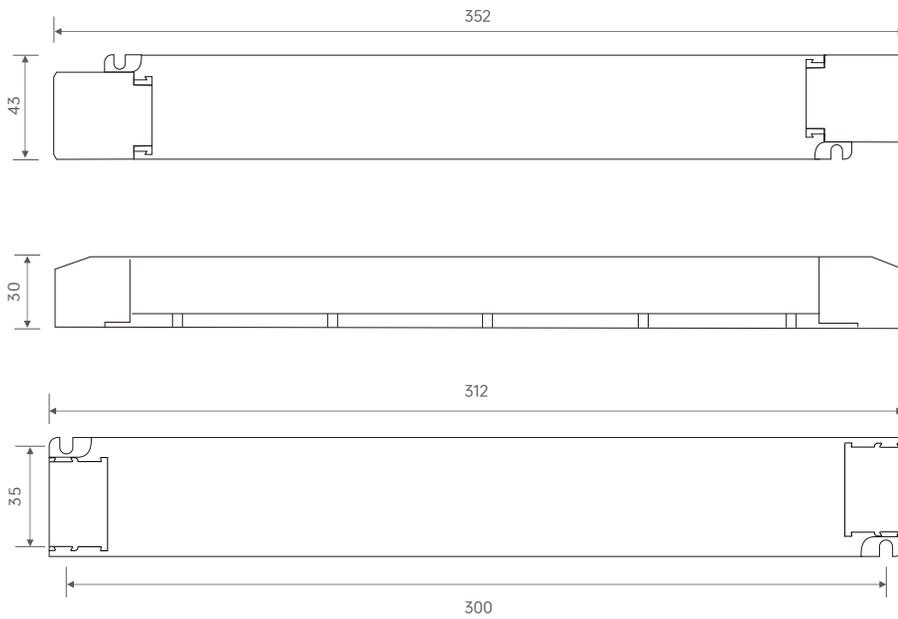


Wiring Diagram

Wireless connection method




Protective Housing Application Diagram

Tension plate

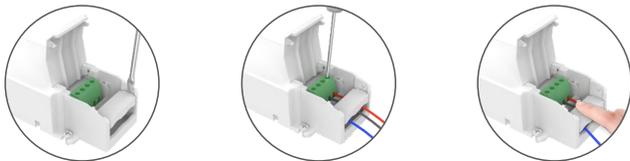



1. Pry up the protecting housing in the side plate position with a tool.
2. Connect to electrical wires with a screwdriver as wiring diagram shows.
3. Press down the tension plate to fix the the electrical wires, then close the protective housing.

Remove the protective housing


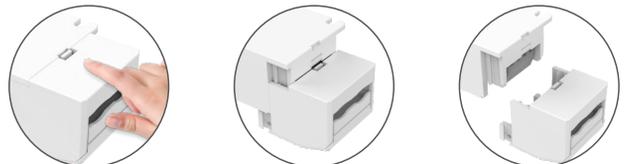


- Pull the housing left and right from the bottom to remove it.



Installation Precautions

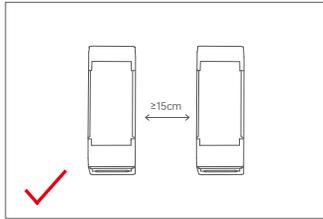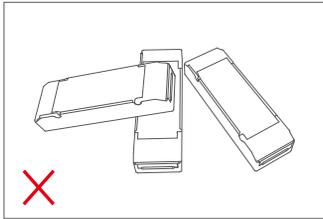



Please do not stack the products. The distance between two products should be $\geq 15\text{cm}$ so as not to affect heat dissipation and the lifespan of the products.

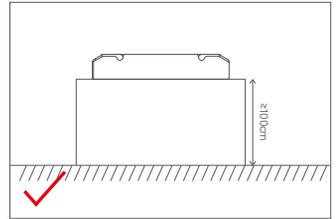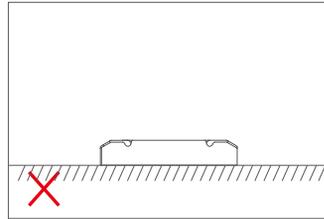



Please do not place the products on the floor. The distance between the product and the floor should be $\geq 100\text{cm}$ so as to avoid signal interference.

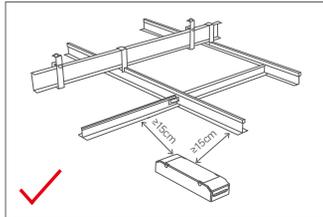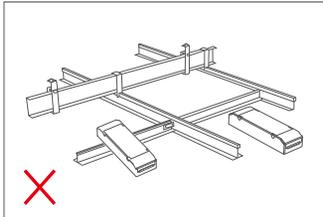

Please do not place the products near a large area of metal objects (such as metal stud ceilings). The distance between the product and the metal object should be $\geq 15\text{cm}$ so as to avoid signal interference.



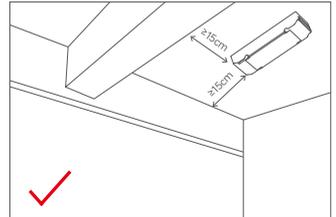
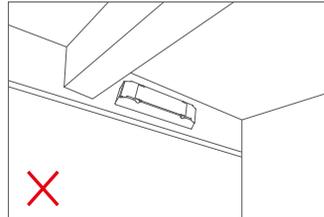






Please do not install the products on beams or near the corners. The distance between the product and the beam or the corner should be $\geq 15\text{cm}$ so as to avoid signal interference.

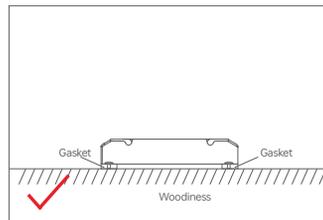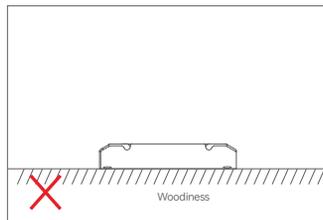

Do not fix the product screws tightly against the wooden board. Instead, add a washer with a thickness of $\geq 7\text{mm}$ under the fixing screws. Leaving some gaps can effectively dissipate heat, preventing any impact on the product's heat dissipation performance and service life.

Relationship Diagrams

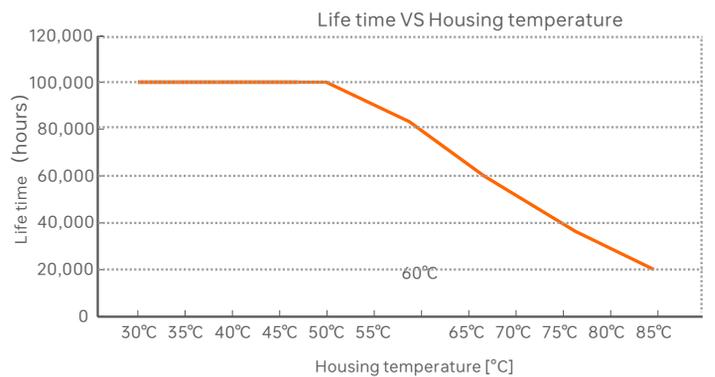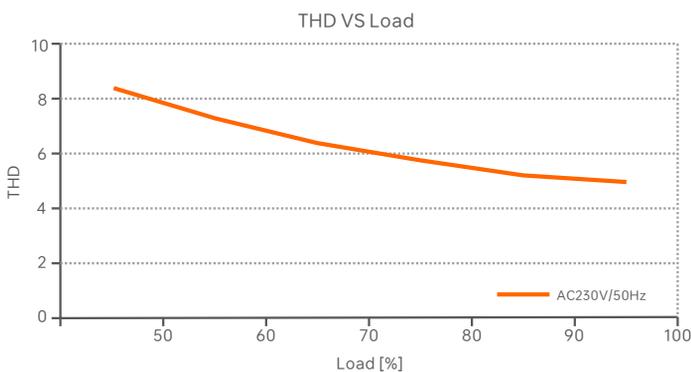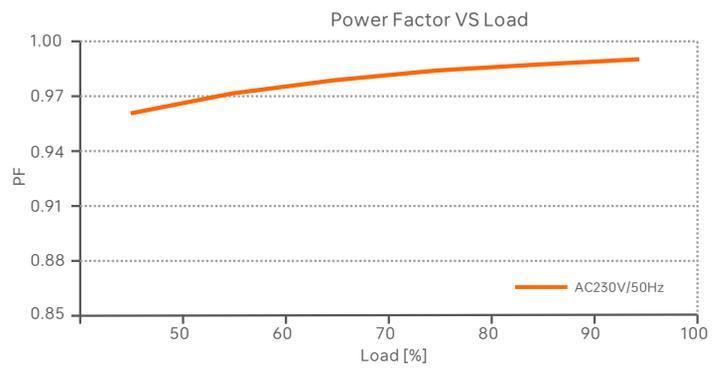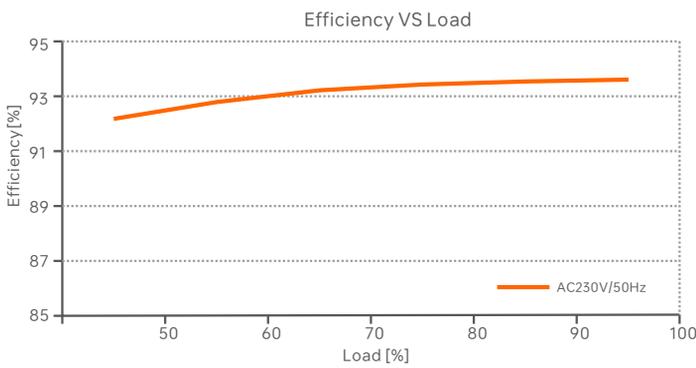

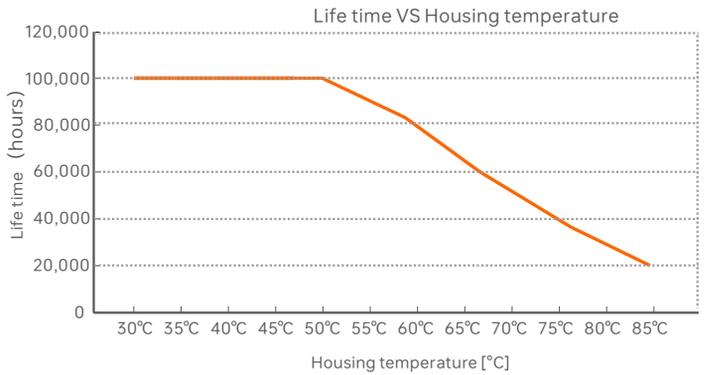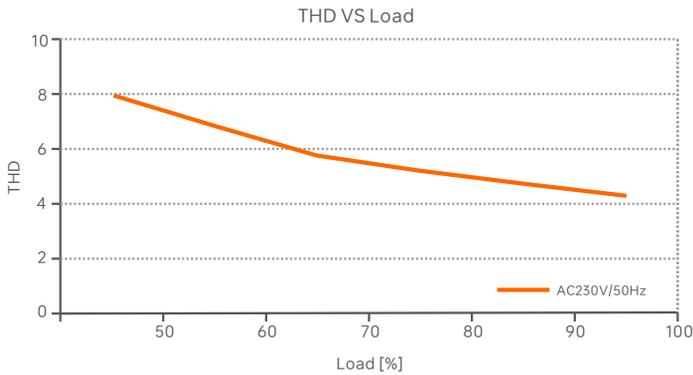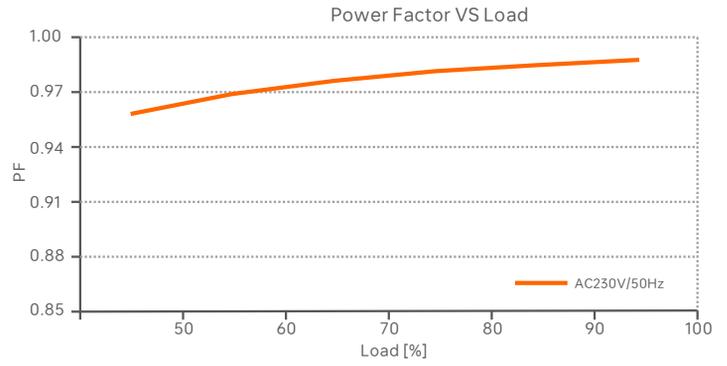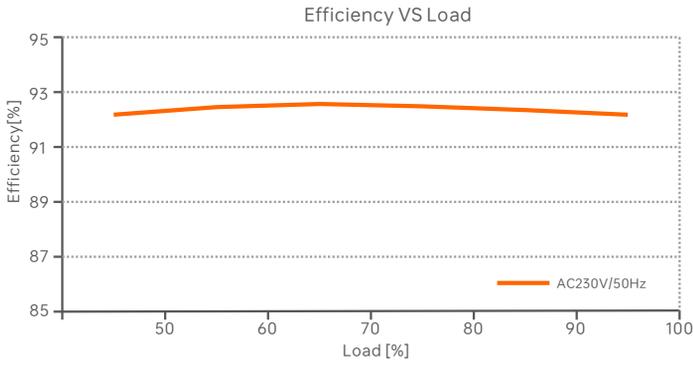

LM-150-12-G2D2F

Surge Current & Corresponding Miniature Circuit Breaker (MCB) Load Capacity Table

MCB Model	B10	B13	B16	B20	B25	C10	C13	C16	C20	C25	D10	D13	D16	D20	D25
Maximum Load Capacity	4	5	6	8	11	7	9	11	14	18	9	11	15	20	26

Remarks:


1. Test Conditions: Cold start 45.6A (Test twidh=500us tested under 50% Ipeak)/230V~
2. The number of supported drivers may vary depending on the brand and model of the MCB.
3. It is recommended not to exceed the specified load capacity during on-site installation. The actual load should be determined based on field conditions.
4. If the ambient temperature exceeds 30°C or multiple MCBs are installed side by side, the number of installed drivers must be reduced and recalculated accordingly.
5. Electricians typically use Type B MCBs for residential lighting and Type C MCBs for commercial lighting applications.
6. Different testing equipment may yield variations in measured current peaks and pulse widths. Always use professional-grade instruments for accurate testing.

Flicker Test Table

IEEE 1789	
Limit Value of Modulation in Low Risk Areas	
Waveform frequency of Optical output (f)	Limit value (%)
f ≤ 8Hz	0.2
8Hz < f ≤ 90Hz	0.025 × f
90Hz < f ≤ 1250Hz	0.08 × f
f > 1250Hz	Exemption assessment
Limit Value of Modulation in No Effect Areas	
Waveform frequency of Optical output (f)	Limit value (%)
f ≤ 10Hz	0.1
10Hz < f ≤ 90Hz	0.01 × f
90Hz < f ≤ 3125Hz	(0.08/2.5) × f
f > 3125Hz	Exemption assessment (High frequency exemption)


Brightness

- ▲ 0.1%
- ◆ 1%
- ◆ 5%
- ◆ 10%
- 20%
- 30%
- 40%
- ★ 50%
- 60%
- 70%
- 80%
- ★ 90%
- ◆ 100%

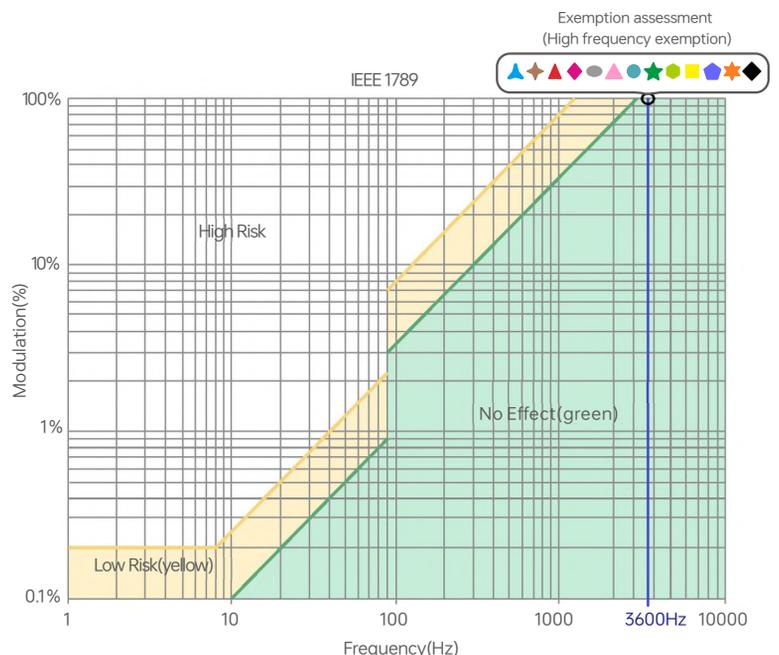


Marks in the right chart are tested results of different current levels. The output frequency is 0Hz in 100% brightness and its corresponding modulation is 0%, which could not be shown in the right chart.

Recommend Applications

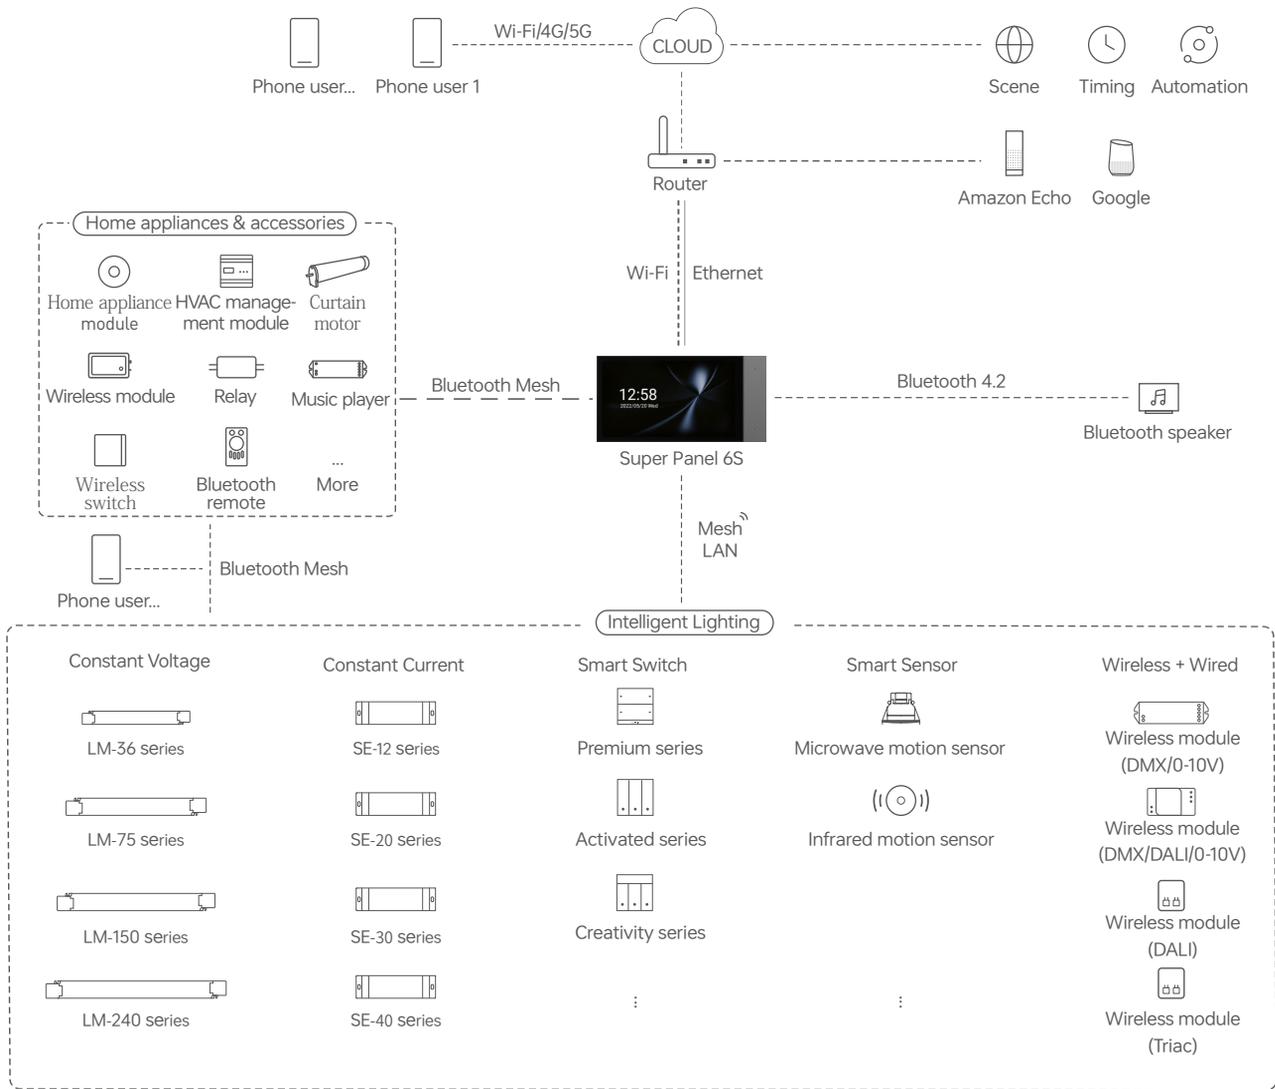


Recommend Applications


1. Achieve fast dimming control.

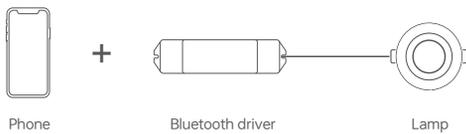

2. Both App and remote can control the driver after connecting the remote to the driver with App.

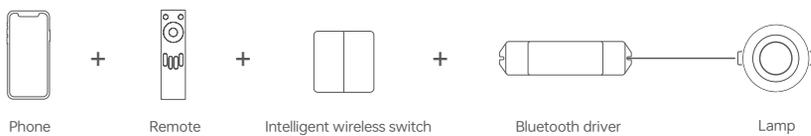

3. Both App and Super Panel 6S can control the driver simultaneously after connecting the Super Panel 6S to the driver with App. By connecting the Super Panel to network, you are allowed to control the driver, cloud scenes and automation remotely with App.

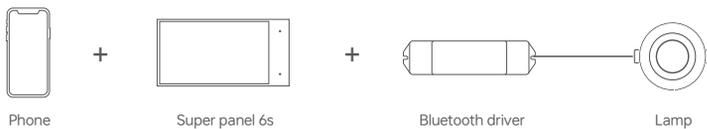

4. More applications of intelligent control are waiting for you to set up.

Use with Bluetooth L-Home APP



1. Register an account

The App is available on iOS or Android devices. Scan the QR code below with your mobile phone and follow the prompts to complete the App installation. Open the App to log in or register an account.






2. Pairing instructions

Open the APP and create a home if you are a new user. Click “+” icon in the upper right corner and access the “Add Device” list, then follow the prompts to add the device. Pick “Smart lighting-DIM light” from the list and follow the prompts to power on the device firstly. Make sure the device is not connected to the network. Then click “Bluetooth Search” and follow the prompts to add the device.

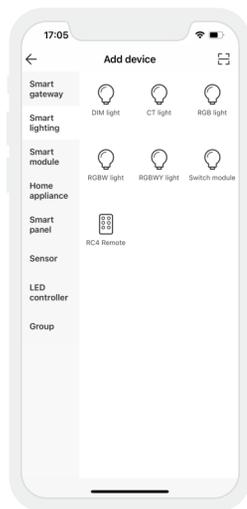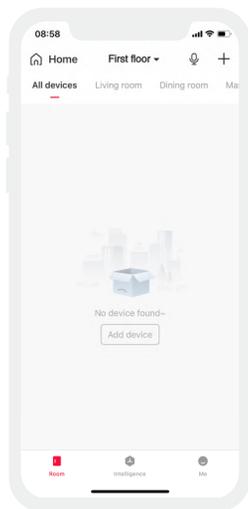


3. Control interface settings

After pairing up your device, go to the control interface. You'll be able to achieve your desired lighting effects by changing brightness and color temperature. Click “Theme” and you'll easily switch to multiple theme lighting effects with one tap. Click “Mode” and the App provides you editable advanced modes. Customize dynamic modes to put you into a more colorful life.

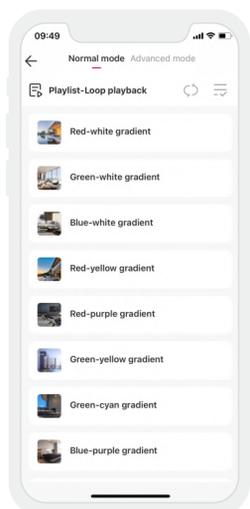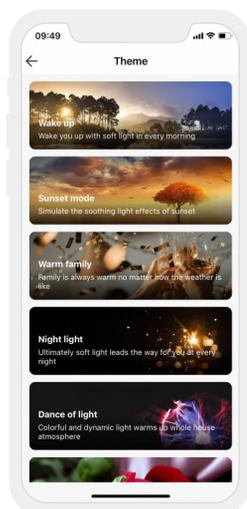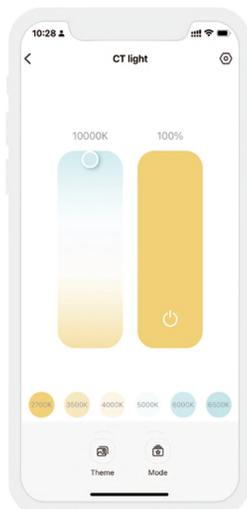


4. Light groups

Users are able to combine the same type of light fixtures into a group to control them simultaneously. Once you create the group, you can set the dim level more easily. Pick "Group-DIM light group" from the list. Follow the prompts to rename the group and click "Next" to pick the lights you are going to group together and click "Save".

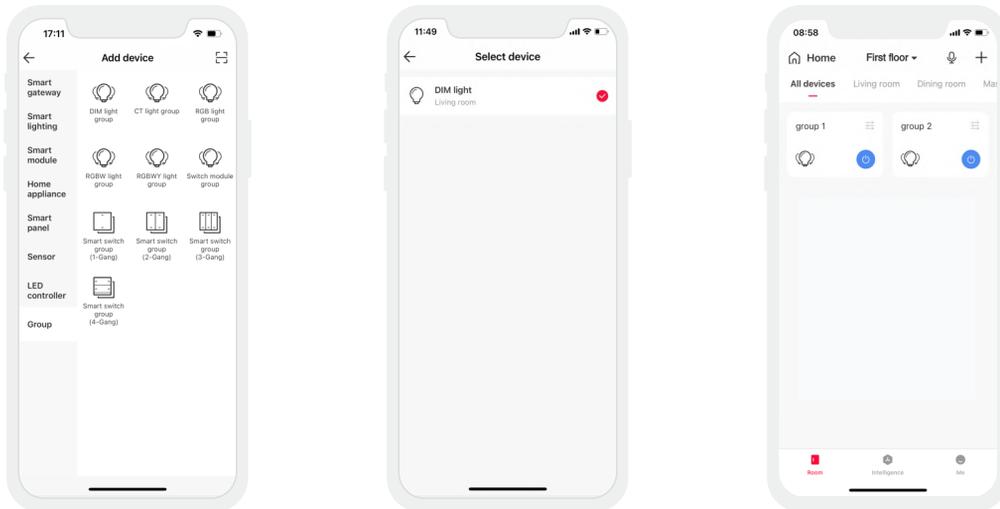


5. Advanced functions

This driver can be linked up with gateway function devices (such as Super Panel 6S) to achieve the advanced functions from local scenes and cloud scenes to automation.

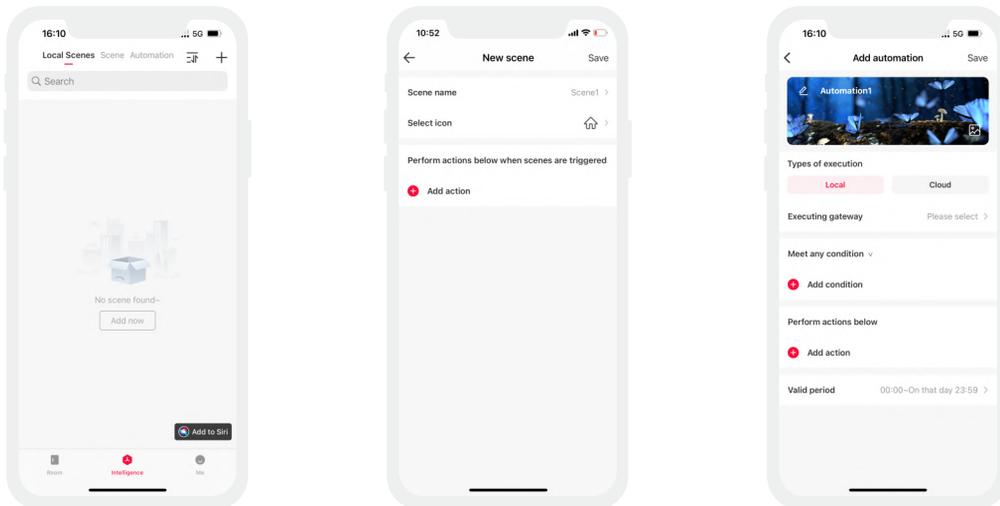

Reset The Device (Reset to factory defaults)

Make sure the driver is well-connected to a lamp and the lamp is on, turn it off with the switch and after 15s turn it on. After 2s, turn it off again. Repeat the same operation 6 times. When the lamp flashes 5 times, reset the device to factory defaults successfully.

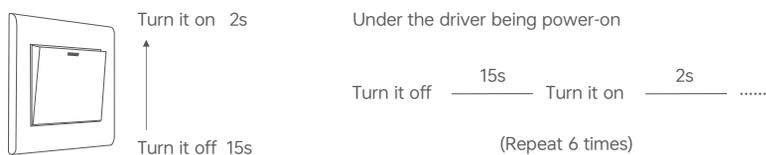

Use the NFC Lighting APP

Scan the QR code below with your mobile phone and follow the prompts to complete the APP installation (According to performance requirements, you need to use a NFC-capable Android phone, or an iPhone 8 and later that are compatible with iOS 13 or higher).



* Before you begin setting the parameters of the driver, please make sure the driver is powered off.

Read/Write the LED driver

Use your NFC-capable phone to read LED driver data, then edit the parameters and they can be directly written to the driver

1. Read the LED driver

On the APP home page, click [Read/Write LED driver], then keep the programmer's sensing area close to the NFC logo of the driver to read the driver parameters.






2. Edit parameters

Click on [Parameter Management] to edit more advanced parameters such as Time for Fading on, Time for Fading off, Power-on Fading Time, Power-on Status and PWM Frequency.

3. Write to the drive


After completing the parameter settings, click [Write] in the upper right corner, and keep the programmer's sensing area close to the NFC logo of the driver, so the parameters can be written to the driver

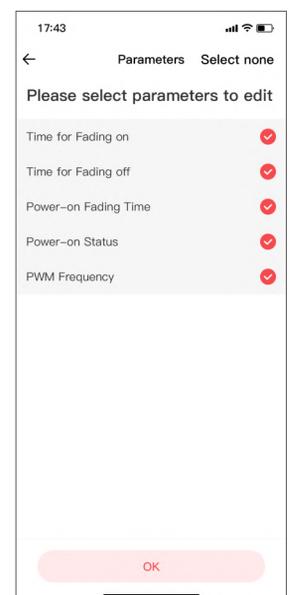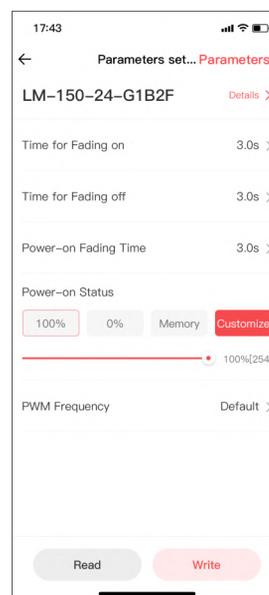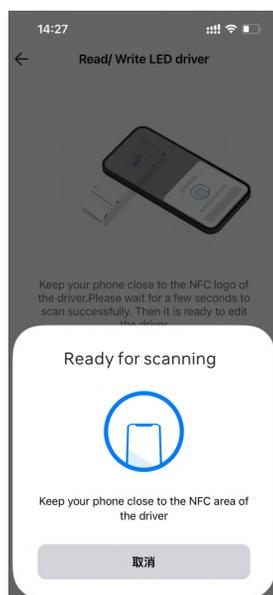

Packaging specification

Model	LM-150-24-G1B2F、LM-150-12-G1B2F
Packaging box size	370×340×93mm(L×W×H)
Quantity	10PCS per layer 2 layers per box 20PCS per box
Weight	0.43kg/PC;9.4kg±5%/box

Packaging style drawing

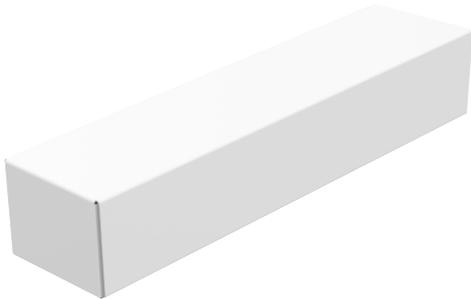

Inner packaging box



Full box packaging

Transportation and Storage

1. Transportation

Products can be shipped via vehicles, boats and planes.

During transportation, products should be protected from rain and sun. Please avoid severe shock and vibration during the loading and unloading process.

2. Storage

The storage conditions should comply with the Class I Environmental Standards. The products that have been stored for more than six months are recommended to be re-inspected and can be used only after they have been qualified.

Attentions

- Product installation and commissioning should be done by a qualified professional.
 - LTECH products are and not lightningproof non-waterproof (special models excepted). Please avoid the sun and rain. When installed outdoors, please ensure they are mounted in a water proof enclosure or in an area equipped with lightning protection devices.
 - Good heat dissipation will prolong the working life of products. Please ensure good ventilation.
 - Please check if the working voltage used complies with the parameter requirements of products.
 - The diameter of wire used must be able to load the light fixtures you connect and ensure the firm wiring.
 - Before you power on products, please make sure all the wiring is correct in case of incorrect connection that causes damage to light fixtures.
 - If a fault occurs, please do not attempt to fix products by yourself. If you have any question, please contact your suppliers.
- * This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our official distributors if you have any question.

Warranty Agreement

- Warranty periods from the date of delivery: 5 years.
- Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
- Any artificial damage caused by high voltage, overload, or improper operations.
- Products with severe physical damage.
- Damage caused by natural disasters and force majeure.
- Warranty labels and barcodes have been damaged.
- No any contract signed by LTECH.

1. Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
2. LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.

Update Log

Version	Updated Time	Update Content	Updated by
A0	2025.06.06	Original version	Li Haipeng

LED智能调光驱动器 (恒压型)

- 外壳采用科思创/三星PC阻燃V0级原料
- 免螺丝压线翻盖设计, 可拆卸端盖, 按需调节壳体长度
- 使用手机APP通过NFC可更改渐变时间、PWM、通电状态等, 实现驱动器数据交互功能
- Bluetooth 5.0 SIG Mesh通信协议, 组网能力强, 可靠稳定
- 支持iOS和安卓智能设备蓝牙直连控制
- 带软启动渐亮功能, 让人眼视觉更舒服
- 调光范围0-100%, LED从0.0001%开始调光
- 高效能电源: 效率93%、PF>0.98、THD<6%
- 符合欧盟能效ERP指令, 待机功耗<0.5W
- 创新的热管理技术, 智能保护电源寿命
- 过温、过压、过载、短路保护, 可自动恢复
- 适合室内I、II、III类灯具应用
- 常规使用下寿命可达10万小时
- 5年保修期 (采用红宝石电容)



无频闪

IEEE 1789
高频豁免级别

Dimmable:
1:1000000

NFC




技术参数

型号	LM-150-24-G1B2F	LM-150-12-G1B2F		
特征	输出类型	恒压		
	调光接口	Bluetooth 5.0 SIG Mesh		
	输出特征	隔离		
	防护等级	IP20		
	绝缘等级	II类(适用于室内I、II、III类灯具)		
输出	输出电压	24V \pm 0.5V	12V \pm 0.5V	
	输出电压范围	24V \pm 0.5V	12V \pm 0.5V	
	输出电流	Max. 6.25A	Max. 12.5A	
	输出功率	Max. 150W		
	输出功率范围	0~150W		
	频闪级别	高频豁免考核级别		
	调光范围	0~100%, 调光深度: 0.0001%		
	过功率限制	\geq 102%		
输入	纹波与噪声	开关纹波 \leq 200mV, 噪声 \leq 500mV	开关纹波 \leq 200mV, 噪声 \leq 800mV	
	PWM调光频率	300-22000Hz		
	输入交流电压	220-240V~		
	输入直流电压	220-240V \pm (EMI需配灯具后评估)		
	频率范围	50/60Hz		
	输入电流	Max. 0.75A/230V~		
	功率因数	PF>0.98/230V~(满载)		
	总谐波失真THD	THD<6%@ 230V~(满载)		
	效率(Typ.)	93%	92%	
	待机功耗	< 0.5W		
环境	浪涌电流	冷启动45.6A (在50%Ipeak下测试twidth=500us)/230V~		
	抗浪涌	L-N: 2KV		
	漏电流	Max. 0.5mA		
	工作温度	ta: -20 ~ 50°C tc: 85°C		
	工作湿度	20 ~ 95%RH, 无冷凝		
保护	储存温度/湿度	-40 ~ 80°C, 10~95%RH		
	温度系数	\pm 0.03%/°C(0-50°C)		
	耐振动	10-500HZ, 2G 12分钟/周期, X, Y, Z轴各72分钟		
	过温保护	根据PCB温度超标情况(\geq 110°C), 智能调节电流输出或关闭, 可自动恢复		
	过载保护	负载电流 \geq 102%, 关闭输出, 可自动恢复		
安规和电磁规格	短路保护	输出线路短路进入打嗝模式, 可自动恢复		
	过压保护	空载电压 \geq 28V, 关闭输出, 可自动恢复	空载电压 \geq 16V, 关闭输出, 可自动恢复	
	耐压	输入对输出: 3750V~		
	绝缘阻抗	输入对输出: 100M Ω /500VDC/25°C/70%RH		
	安全规范	CCC	中国	GB19510.1, GB19510.14, GB19510.213
		TUV	德国	EN61347-1, EN61347-2-13, EN62493
		CB	CB成员国	IEC61347-1, IEC61347-2-13
		CE	欧盟	EN61347-1, EN61347-2-13, EN62384
		KC	韩国	KC61347-1, KC61347-2-13
		EAC	俄罗斯	IEC61347-1, IEC61347-2-13
		RCM	澳洲	AS 61347-1, AS 61347-2-13
		ENEC	欧洲	EN61347-1, EN61347-2-13, EN62384
	电磁兼容发射	BIS	印度	IS 15885 (PART 2/SEC 13)
		CCC	中国	GB/T17743, GB17625.1
		CE	欧盟	EN55015, EN61000-3-2, EN61000-3-3, EN61547
KC		韩国	KN15, KN61547	
EAC		俄罗斯	IEC62493, IEC61547, EH55015	
RCM		澳洲	EN55015, EN61000-3-2, EN61000-3-3, EN61547	
功耗		网络待机功耗	< 0.5W (通过指令开关后)	
ErP	空载功耗	无空载模式		
	频闪/频闪效应	IEEE1789	满足无影响/高频豁免考核级别	
	DF	CIE SVM	PstLM \leq 1.0, SVM \leq 0.4	
其他	DF	相位因素	DF \geq 0.9	
	产品重量	430g \pm 10g		
产品尺寸	352 \times 43 \times 30mm(L \times W \times H)			

本款驱动器适合连接电阻限流的LED灯具(如LED灯条)。如果连接内置恒流IC限流的灯具, 会产生几十倍的瞬间浪涌电流, 导致驱动器会执行过载保护(打嗝频闪)。下单时这类内置恒流IC限流的灯具需要注明(如MR16灯杯、地埋灯、洗墙灯、恒流硬灯条等), 以便烧写特殊程序。

尺寸图

单位: mm

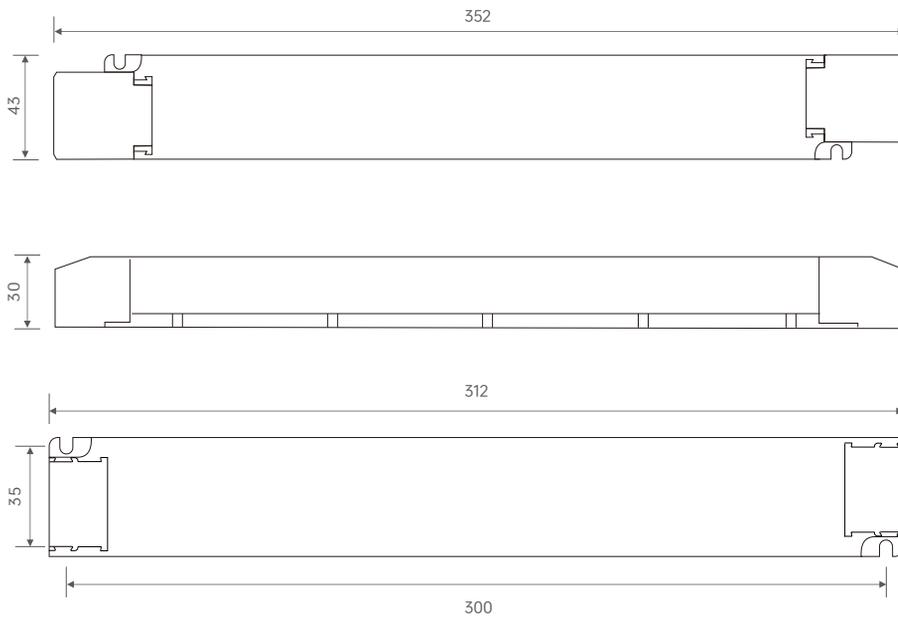

连接应用图

无线连接方式




保护盖应用图


压线板



1. 使用工具撬起压线板侧边即可拆下。



2. 使用螺丝批按照接线图接线。




3. 向下按压压线板固定住接线图上保护盖即可。


保护盖的拆装





在底部左右滑动, 即可将保护盖拆下。





安装注意事项

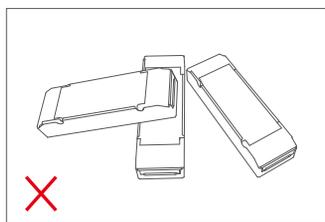



请勿将产品堆叠摆放，产品与产品间隔距离应 $\geq 15\text{cm}$ ，避免影响产品散热和使用寿命。

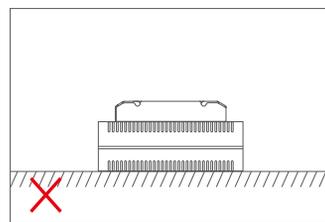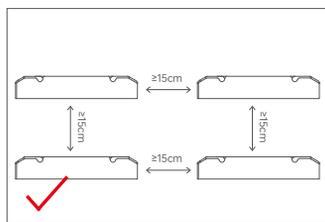



请勿将产品置于电源上方，与电源间隔距离应 $\geq 15\text{cm}$ ，避免影响产品散热而减少使用寿命。

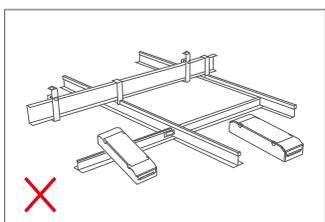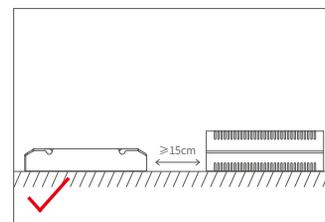


请勿将产品大面积接触金属物体(如: 龙骨架), 间隔距离应 $\geq 15\text{cm}$, 以免信号干扰影响使用。

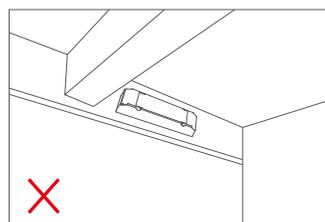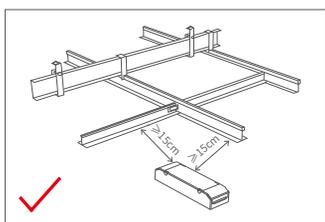

请勿将产品安装在横梁、墙角等位置，间隔距离应 $\geq 15\text{cm}$ ，以免信号干扰影响使用。

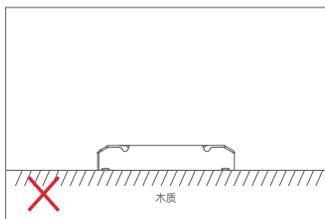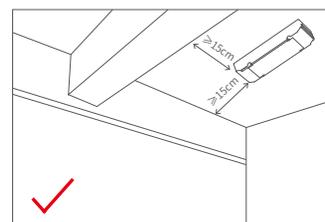


请勿将产品螺丝固定紧贴于木板，应在固定螺丝下增加 $\geq 7\text{mm}$ 的垫片，留点空隙可以有效散热，避免影响产品散热和使用寿命。

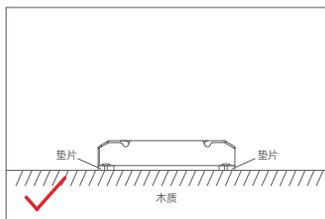


关系图表


效率与负载关系图

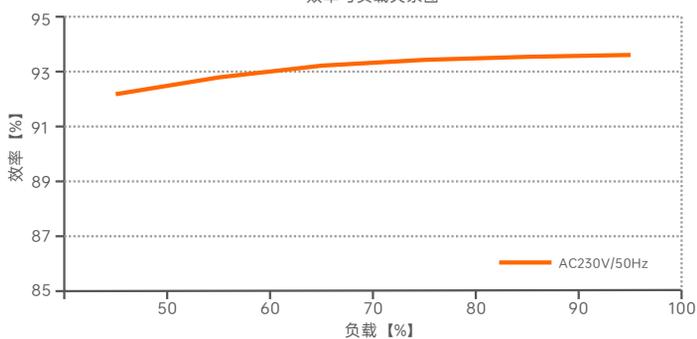


功率因数特征图




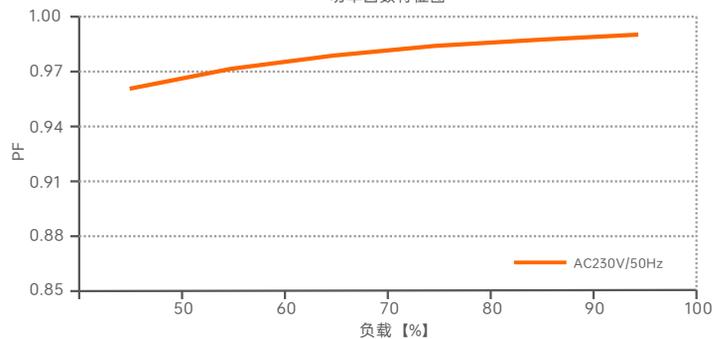


THD与负载关系图

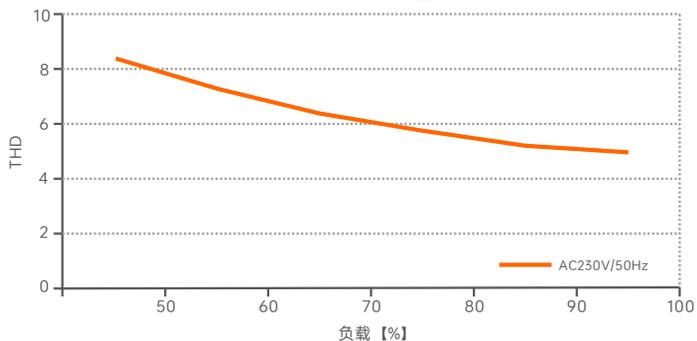

寿命与外壳温度关系图

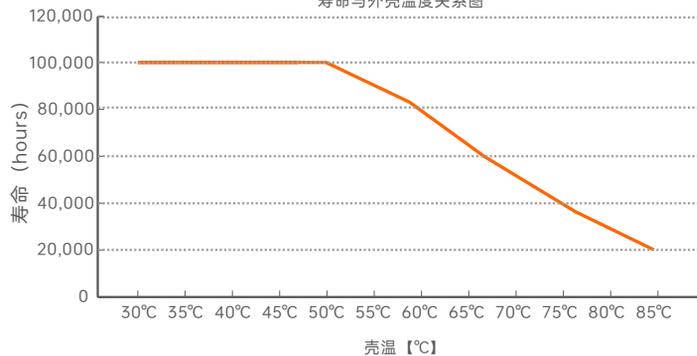

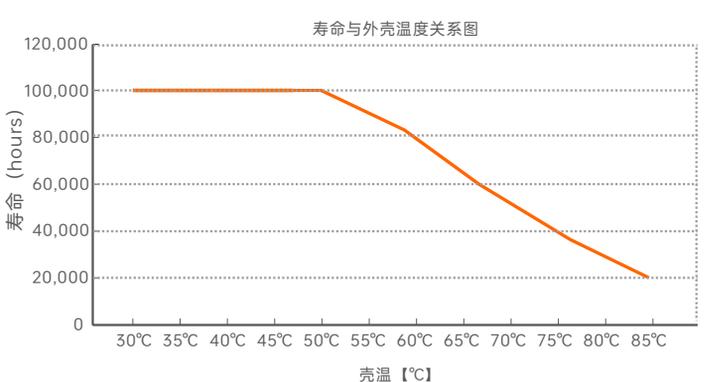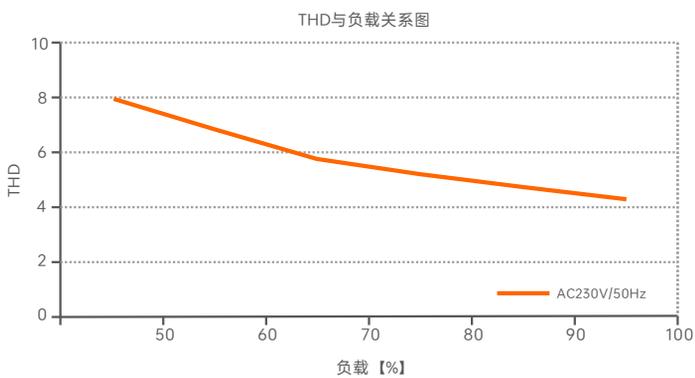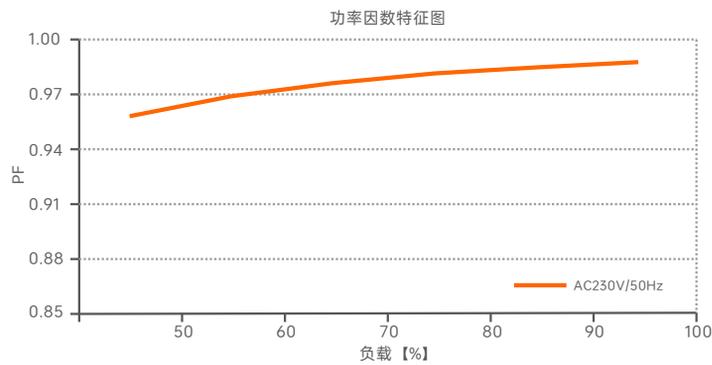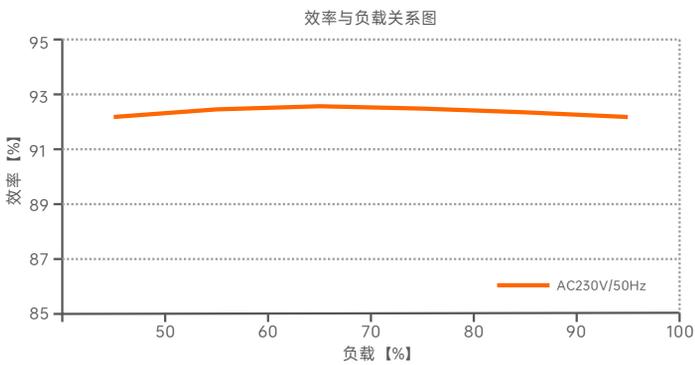

LM-150-12-G1B2F

浪涌电流&对应的微型断路器(MCB)下挂载的数量对应表

微型断路器型号	B10	B13	B16	B20	B25	C10	C13	C16	C20	C25	D10	D13	D16	D20	D25
最大挂载数量	4	5	6	8	11	7	9	11	14	18	9	11	15	20	26

备注:


1. 本数据测试条件: 冷启动, 45.6A/(在50%peak下测试twidth=500us)/230V~;
2. 对于不同品牌和型号的微型断路器, 驱动器的数量会有所不同;
3. 现场安装时建议不要超过上述数量, 具体负载量以现场安装为准;
4. 当微型断路器的安装环境温度超过30°C或多个微型断路器并排安装时, 安装的驱动器数量将减少, 这需要重新计算;
5. 电工通常考虑将B型MCB用于家用照明, 将C型MCB用于商业照明;
6. 不同仪器设备测试出来的电流峰值和脉冲宽度有差异, 请使用专业仪器设备测试;

频闪测试表


IEEE 1789

低风险区域 (Low Risk) 的波动深度 (Modulation) 限值	
光输出波形频率 f	限值 (%)
$f \leq 8\text{Hz}$	0.2
$8\text{Hz} < f \leq 90\text{Hz}$	$0.025 \times f$
$90\text{Hz} < f \leq 1250\text{Hz}$	$0.08 \times f$
$f > 1250\text{Hz}$	免除考核
无风险区域 (No Effect) 的波动深度 (Modulation) 限值	
光输出波形频率 f	限值 (%)
$f \leq 10\text{Hz}$	0.1
$10\text{Hz} < f \leq 90\text{Hz}$	$0.01 \times f$
$90\text{Hz} < f \leq 3125\text{Hz}$	$(0.08/2.5) \times f$
$f > 3125\text{Hz}$	免除考核 (高频豁免)

- 亮度
- ▲ 0.1%
 - ◆ 1%
 - ▲ 5%
 - ◆ 10%
 - 20%
 - ◆ 30%
 - 40%
 - ★ 50%
 - 60%
 - 70%
 - 80%
 - ★ 90%
 - ◆ 100%

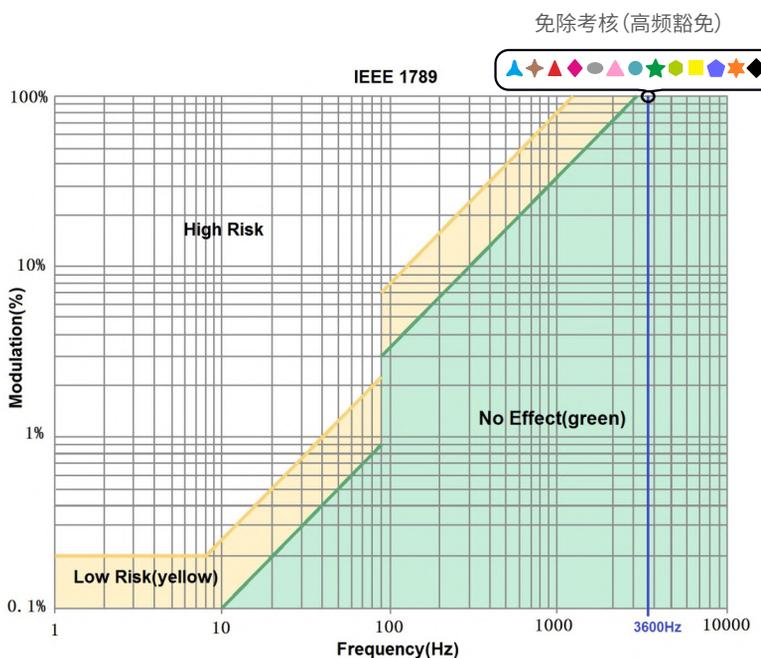


系统图

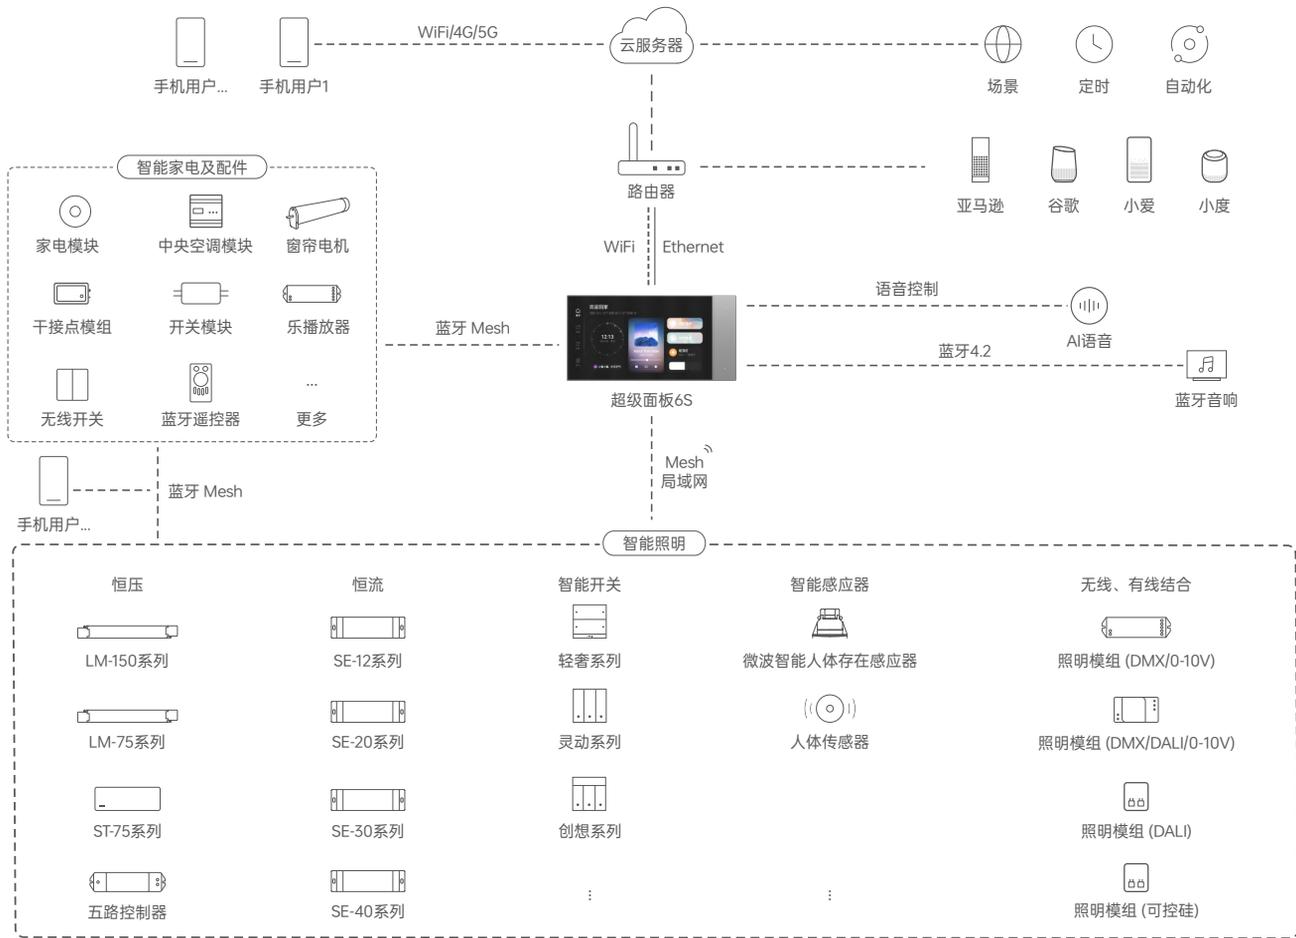

推荐应用控制方式


1、快速实现本地调光。

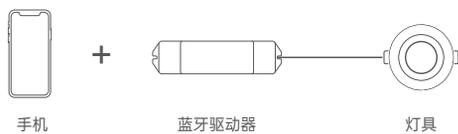

2、通过APP设置遥控关联驱动后，可实现APP与遥控两种控制方式控制驱动。



3、通过APP设置面板关联驱动，可实现APP与面板同时控制。并能够通过面板联网，可实现APP远程控制驱动，云场景，自动化联动功能。

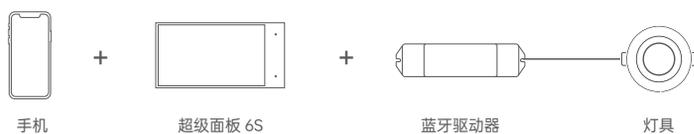

4、.....智能控制，更多应用搭配等您来设置。

APP操作说明

1. 账号注册

APP兼容iOS和Android系统，通过手机扫描下方二维码，按提示完成APP安装,安装后即可进行登录/注册操作。




2. 配对操作

新用户创建家庭后，点击右上角“+”进入添加设备列表，先将驱动器按照提示添加完成后，在添加设备列表选择“智能照明-调光灯”后，按照界面提示，先将设备接通电源，确保设备处于未入网状态。然后点击“蓝牙搜索”后，按照提示完成添加设备。



3. 控制界面设置

配对完成后，进入控制界面，可以通过调节亮度达到想要的灯光效果。点击主题，进入主题界面，可一键切换多种主题灯光效果。点击模式，具有可编辑的高级模式。自定义动态模式，让您的生活更加丰富多彩。

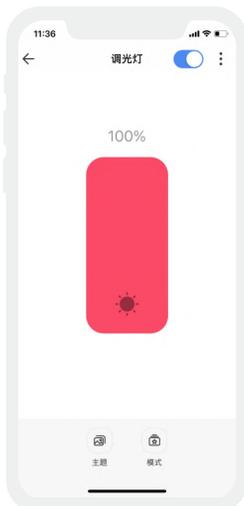


4. 灯具群组

同类型的灯具可以组成群组，用户可以对群组进行调光等操作，操作更便利。在添加设备列表中选择“群组—调光灯组”，按照界面提示编辑灯组名称后，点击“下一步”，勾选您要组成群组的设备，保存即可。



5. 高级功能

本产品可以通过与具有网关功能的设备联动，如超级面板6S。可实现本地场景、云场景、自动化等高级功能。

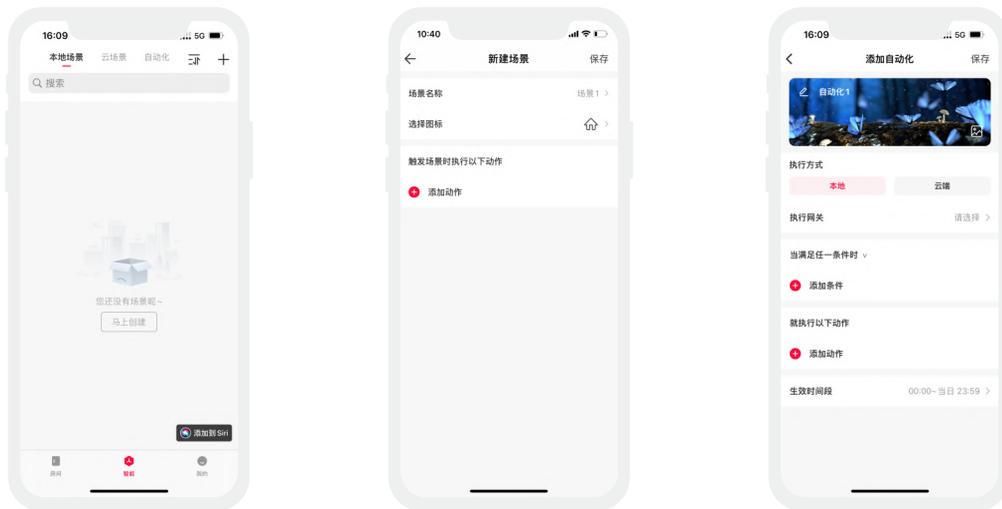

重置设备 (恢复出厂设置)

确保驱动已接灯具且处于常亮状态下，使用开关让驱动连续断通电6次（每次断电时间15秒，通电2秒），第六次通电2秒后，灯具闪烁5次，即表示驱动已恢复到出厂设置状态。



搭配 NFC Lighting APP 使用

通过手机扫描下载二维码，按提示完成APP安装。(因性能需求，要求手机型号苹果：iPhone 8及以上、且操作系统iOS13及以上； 安卓：具备NFC功能机型)



* 设置驱动器参数时，必须在驱动器断电情况下进行操作。

读/写智能电源

使用手机，通过NFC读取驱动器信息，根据需求设置参数后，可直接写入驱动器。

1. 读取驱动器

在APP“首页”点击【读/写智能电源】，将手机感应区域靠近驱动器NFC标识点，读取驱动器参数。



2. 编辑参数

点击【参数管理】可编辑开灯渐变时间、关灯渐变时间、通电渐变时间、通电状态、PWM频率等参数。

3. 写入驱动器


参数设置完成后，点击右上角【写入】，将手机感应区域靠近驱动器NFC标识点，即可写入驱动器成功修改参数。



包装规格

型号	LM-150-24-G1B2F / LM-150-12-G1B2F
包装箱尺寸	370×340×93mm(L×W×H)
数量	10PCS/层; 2层/箱; 20PCS/箱
重量	0.43kg/PC; 9.4kg±5%/箱

包装样式图

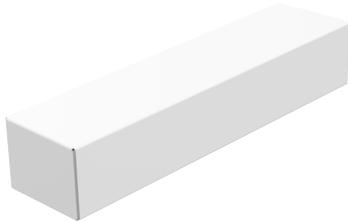

内包装盒



整箱包装

常见问题

1. 设备添加失败怎么办?
 - 1.1 确保设备正常通电, 并且处于激活状态;
 - 1.2 需要添加的设备未被其他账号添加过, 如被添加过, 请手动恢复出厂;
 - 1.3 确保手机与设备两者尽量靠近, 建议不超过20米;
 - 1.4 如设备已被强制删除, 请手动恢复出厂, 然后重新添加设备。
2. 设备离线怎么办?
 - 2.1 请检查设备是否正常通电;
 - 2.2 请检查路由器是否工作正常, 网络畅通;
 - 2.3 如使用远程控制, 请检查手机网络是否工作正常, 网络畅通。
3. 如何远程控制/云场景设置?

如需远程控制/添加云场景设置, 需搭配本司超级面板方可使用。
4. 如何共享设备?

请在“我的”-“家庭管理”, 进入需要共享的家庭, 点击“添加成员”, 请按提示将需要设备共享的家人/朋友加入该家庭即完成共享。

运输和贮存

1. 运输

产品适用车、船、飞机交通运输工具运输。

在运输中, 应使用遮蓬进行防雨和防晒, 并保持文明装卸, 不应有剧烈振动、撞击等。

2. 贮存

贮存符合I类环境的规定。贮存期限超过6个月的产品建议重新检验, 合格后方可使用。

注意事项

- 请由具有专业资格的人员进行调试安装;
- 雷特产品(专有型号除外)不能防水, 需避免日晒雨淋, 如安装在户外, 请用防水箱;
- 良好的散热条件会延长产品的使用寿命, 请把产品安装在通风良好的环境;
- 请检查使用的工作电压是否符合产品的参数要求;
- 使用的电线直径大小必须能足够负载连接的LED灯具, 并确保接线牢固;
- 通电调试前, 应确保所有接线正确, 以避免因接线错误而导致灯具损坏;
- 如果发生故障, 请勿私自维修; 如果有疑问, 请联系供应商。

* 本说明书的内容如有变更, 恕不另行通知。若内容与您使用的功能有所不同, 则以实物为准。如有疑问, 欢迎向我司授权的经销商咨询。

保修条例

- 自出厂之日起保修服务期为5年。
- 在保修服务期内出现产品质量问题雷特将给予免费修理或更换服务。

非保修条例:

属下列情况不在免费保修或更换服务范围之内:

- 已经超出保修服务期;
- 过高电压、超负载、操作不当等人为造成的损坏;
- 产品外形严重损坏或变形;
- 自然灾害以及人力不可抗拒原因造成的损坏;
- 产品保修标签和产品唯一条形码损坏;
- 无雷特签订的合同或发票凭证。

1. 修理或更换是雷特对客户的一补救措施。雷特不承担任何附带引起的损害赔偿, 除非在适用法律范围之内。

2. 雷特享有修正或调整本保修条款的权利, 并以书面形式发布为准。

更新日志

版本	更改日期	更改内容	更改人
A0	2025.04.11	正稿	黎海鹏