

DALI LED Dimming Driver

0~240...480W 0~20A 12~24Vdc

- Dimming interface: DALI, Push Dim.
- PWM digital dimming, standard DALI logarithmic dimming curve.
- Dimming range: 0~100%, LED start at 0.1% possible.
- 4CH isolated control output, Max. current output: 20A.
- Full protective plastic housing.
- DALI bus standard: IEC62386.
- Suitable for indoor environments.



FC CE RoHS


warranty
5 years

Main Characteristics


Dimming Interface: DALI, Push Dim
 Input Voltage: 12~24Vdc
 Output Voltage: 12~24Vdc
 Output: 5A×4CH Max. 20A
 Max. Output Power: (0~60W...120W)×4CH Max. 480W


Dimming Range: 0~100%
 Working Temperature: -30°C~55°C
 Product Size: L175×W44×H30(mm)
 Package Size: L178×W48×H33(mm)
 Weight(G.W.): 135g

Dimensions

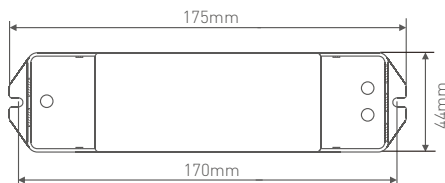


System Connection Diagram:

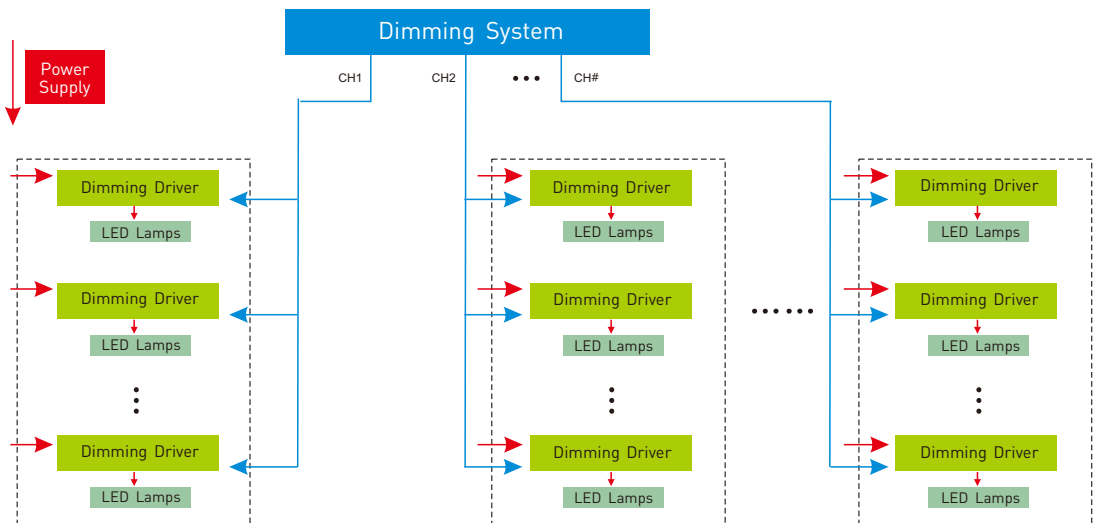




DALI bus no need distinguish plus-minus polarity.

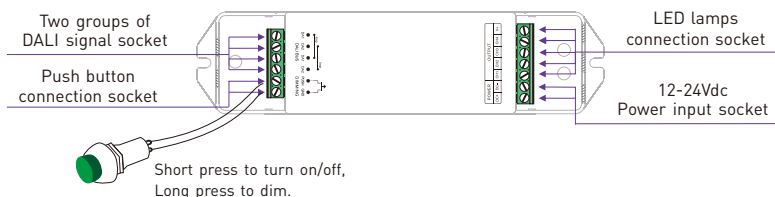

12V lamp connected, loads 0~240W(12V); 24V lamp connected, loads 0~480W(24V).

DA1 DA2

N L ±

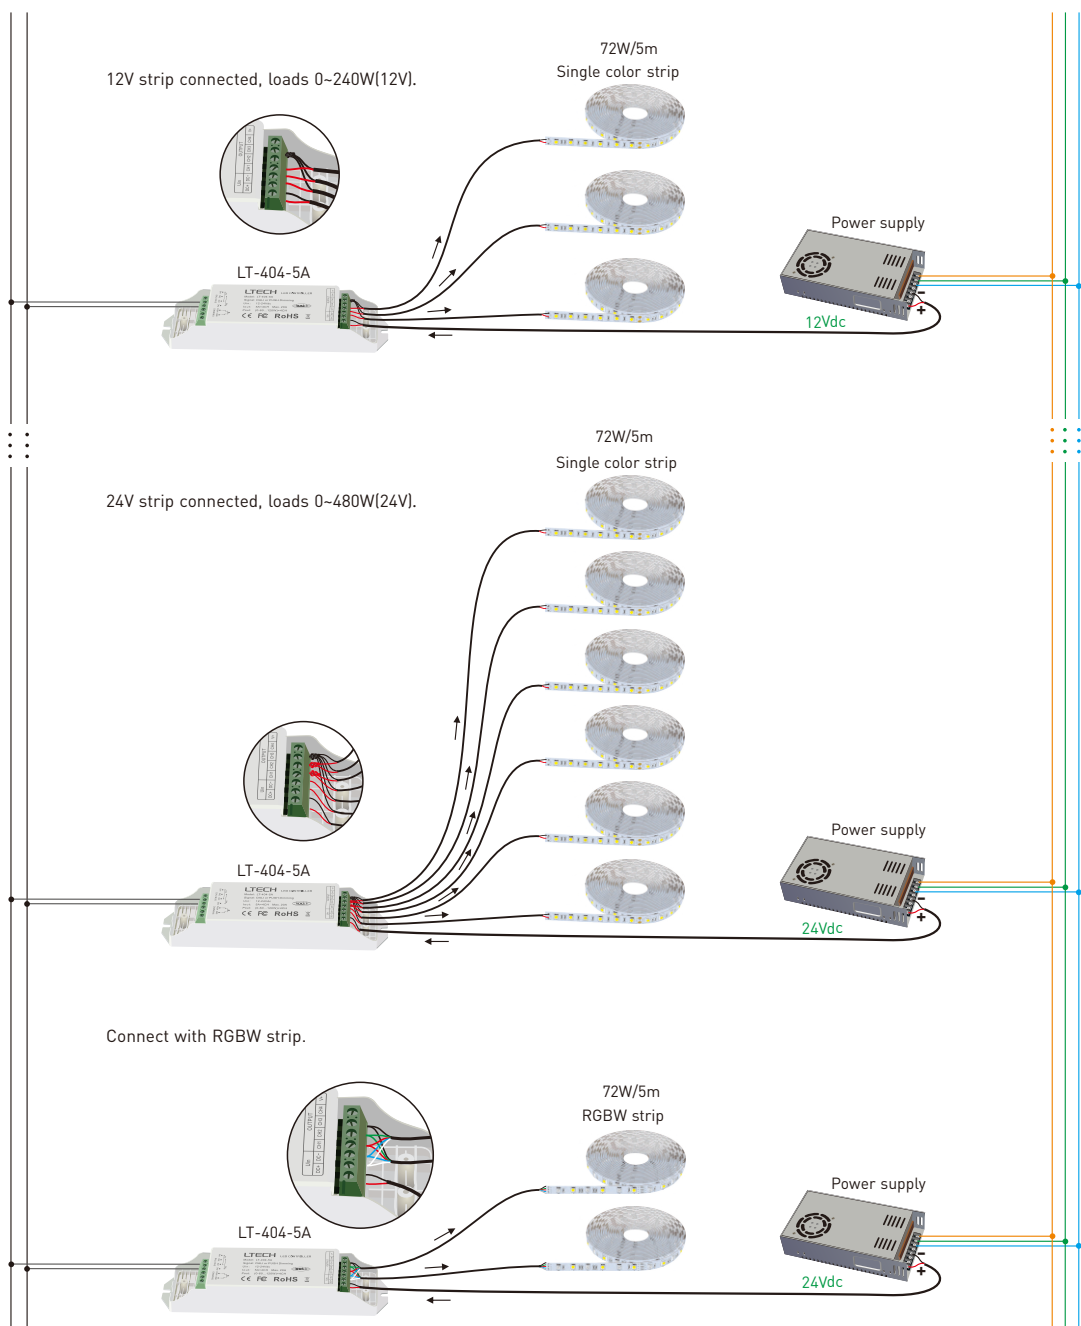

DALI LED 调光驱动器

0~240...480W 0~20A 12~24Vdc

- 调光接口：DALI, 按钮
- PWM数字调光，标准DALI对数调光曲线
- 调光范围：0~100%，LED从0.1%开始调光
- 4路独立控制输出，最大可负载20A电流
- 全防护塑胶外壳
- DALI总线标准 IEC62386
- 适合室内LED照明环境应用




FC CE RoHS [质保5年] ISO9001:2008

产品参数


调光接口： DALI, Push Dim
 输入电压： 12~24Vdc
 输出电压： 12~24Vdc
 负载电流： 5A×4路 Max. 20A
 输出功率： (0~60W...120W)×4路 Max. 480W


调光范围： 0~100%
 工作温度： -30°C~55°C
 产品尺寸： L175×W44×H30(mm)
 包装尺寸： L178×W48×H33(mm)
 重量(毛重)： 135g

尺寸图

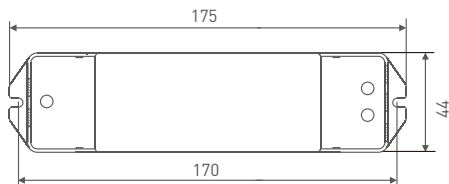


系统连接图

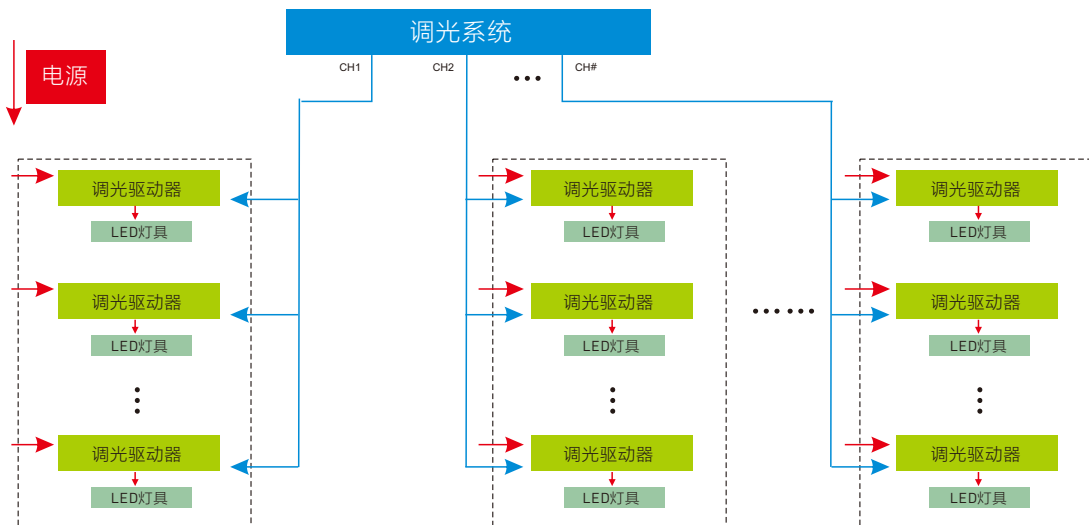



DALI 总线
不用区分正负极

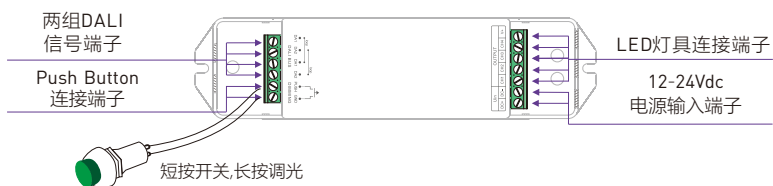

连接12V LED灯具, 可负载0~240W(12V); 连接24V LED灯具, 可负载0~480W(24V)。

