

## Intelligent Tunable White LED Driver (Constant Voltage)

- Small size and light weight. The housing is made from V0 flame retardant PC materials from SAMSUNG/COVESTRO.
- The clamshell design and screwless type for strain-relief. The design of dismountable end cap allows you to adjust the length of housing depending on your needs.
- Bluetooth 5.0 SIG Mesh with high networking capability is reliable and stable.
- Gain control on iOS or Android devices through Bluetooth connection.
- With soft-on and fade-in dimming function, enhancing your visual comfort.
- Dimming from 0-100%, down to 0.1%.
- Comply with the EU's ErP Directive, standby power consumption<0.5W.
- The secure and reliable design for signal isolation.
- Innovative thermal management technology intelligently protects the life of the LED driver.
- Overheat, over voltage, overload, short circuit protection and automatic recovery.
- Suitable for Class I/II/III indoor light fixtures.
- Up to 50,000-hour life time.
- 5-year warranty (Rubycon capacitor).




**Flicker Free**  
IEEE 1789

Dimmable:  
0.1%-100%



Use only within an enclosure.

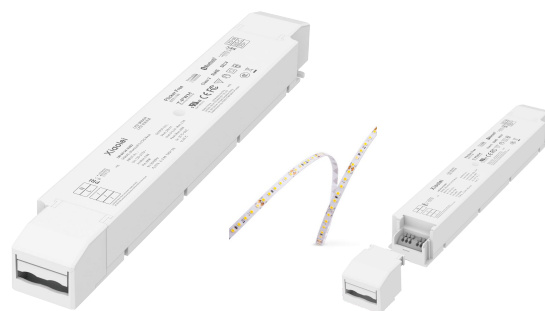





## Technical Specs

Model		LM-60-24-U2B2			
Features	Output Type	Constant Voltage			
	Dimming Interface	Bluetooth 5.0 SIG Mesh			
	Output Feature	Isolation			
	Protection Grade	IP20			
	Insulation Grade	Class II (Suitable for class I/ II /III light fixtures)			
OUTPUT	Output Voltage	24Vdc			
	Output Voltage Range	24Vdc±0.5Vdc			
	Output Current	Max. 2.5A			
	Output Power	Max. 60W			
	Output Power Range	0-60W			
	Strobe Level	High frequency exemption level			
	PWM Frequency	3600Hz			
	Dimming Range	0-100%, down to 0.1%			
	Overload Power Limitation	>102%			
Ripple (maximum)	200mVp-p				
INPUT	Input Voltage	120-277Vac			
	Frequency	50/60Hz			
	Input Current	Max. 0.6A/120Vac, 0.35A/230Vac, 0.3A/277Vac			
	Power Factor	PF>0.99/120Vac, PF>0.95/230Vac, PF>0.9/277Vac (at full load)			
	THD	120Vac@THD<5%, 230Vac@THD<7%, 277Vac@THD<10% (at full load)			
	Efficiency (Typ.)	91%			
	Standby power consumption	<0.5W			
	Inrush Current	Cold start 45A[Test twidth=840us tested under 50% Ipeak]/230Vac			
	Anti Surge	L-N: 2KV			
Leakage Current	Max. 0.5mA				
ENVIRONMENT	Working Temperature	ta: -20-50°C tc: 85°C			
	Working Humidity	20-95%RH, non-condensing			
	Storage Temperature/Humidity	-40-80°C, 10-95%RH			
	Temperature Coefficient	±0.03%/°C[-20-50°C]			
	Vibration	10-500Hz, 2G 12min/1cycle, 72 min for X, Y and Z axes respectively			
PROTECTION	Overheat Protection	Intelligently adjust or turn off the output current if the PCB temperature ≥110°C, and recover automatically			
	Overvoltage Protection	Shut down the output when non-load voltage≥28V, and recover automatically			
	Overload Protection	Shut down the output when current load≥102%, and recover automatically			
	Short Circuit Protection	Enter hiccup mode if short circuit occurs, and recover automatically			
SAFETY & EMC	Withstand Voltage	I/P-O/P: 3750Vac			
	Isolation Resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH			
	Safety Standards	CCC	China	GB19510.1, GB19510.14, GB19510.213	
		UL	America	UL8750	
		CUL	Canada	CSA C22.2 NO. 250. 13	
		CE	European Union	EN61347-1, EN61347-2-13, EN62384	
EMC Emission	FCC	America	FCC PART 15		
	CE	European Union	EN55015, EN61000-3-2, EN61000-3-3, EN61547		
	CCC	China	GB/T17743, GB17625.1		
OTHERS	EMC Immunity	EN61000-4-2,3,4,5,6,8,11, EN61547			
	Strobe Test Standard	IEEE 1789			
	Weight(N.W.)	285g			
	Dimensions	293×42.5×30mm(L×W×H)			

\* The driver is suitable for connecting resistor current-limiting LED fixture (e.g. LED strip). The inrush current will be dozens of times increased if connecting built-in constant current IC current-limiting LED fixtures, the driver will activate the overloaded protection (hiccup flickering). When you order, please remark controlling the constant current LED fixture (e.g. MR16 lamp, underground light, LED wall washer, constant current LED strip, etc.), so that we can prepare them with special procedures.

## Product Size


Unit: mm

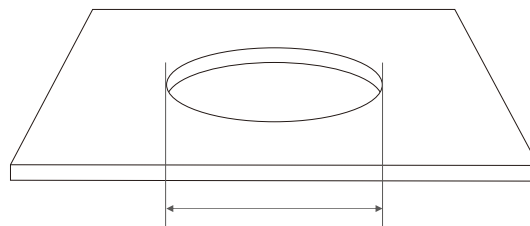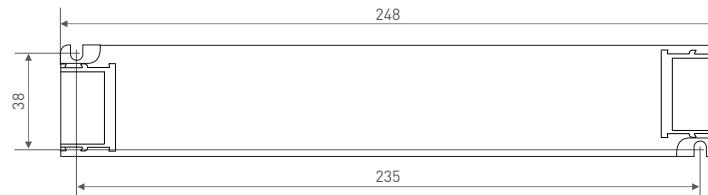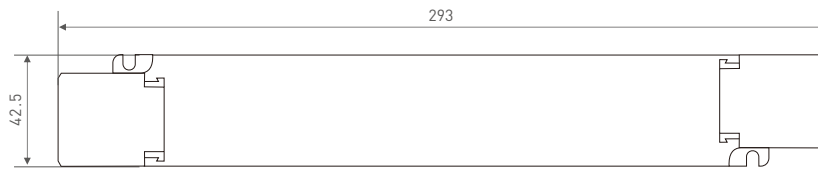

Minimum hole size:  $\phi 50\text{mm}$  (1,97")

## Wiring Diagram

Wireless connection mode

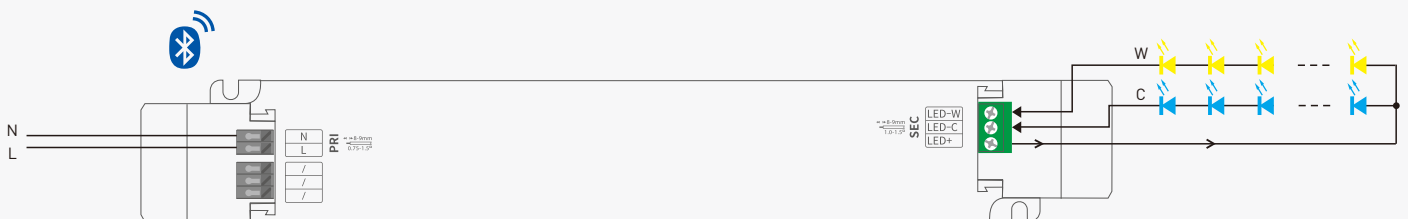


Wire diameter: 0.75-1.5' [22-16AWG]  
Strip length: 5-6mm

Wire diameter: 1.0-1.5' [18-16AWG]  
Strip length: 8-9mm

\* Access the network to control through App and Bluetooth

## Protective Housing Application Diagram

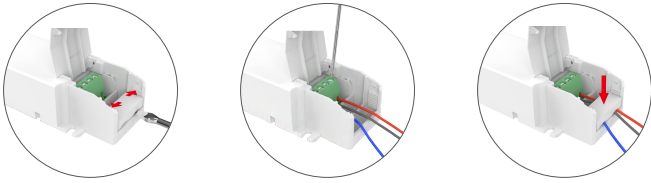


Open the protective housing and push the side housing outwards to pry up the wire fixing board with a screwdriver. Then connect to electrical wires as wiring diagram shows. Press down the wire fixing board to fix the electrical wires, finally close the protective housing.




Press down the back side of the protective housing and move it from side to side to remove it.


## Installation Precautions

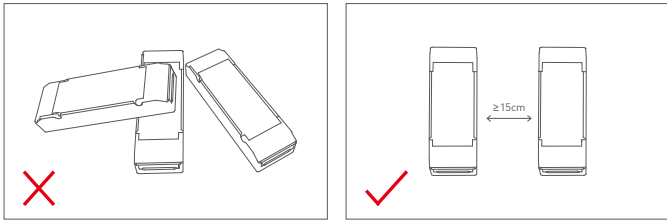


Please do not stack the products. The distance between two products should be  $\geq 15\text{cm}$  so as not to affect heat dissipation and the lifespan of the products.

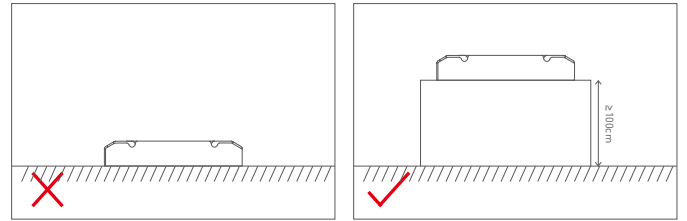

Please do not place the products on the floor. The distance between the product and the floor should be  $\geq 100\text{cm}$  so as to avoid signal interference.

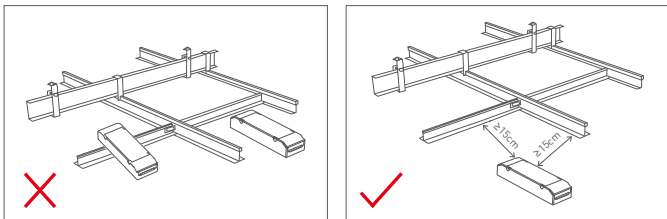


Please do not place the products near a large area of metal objects (such as metal stud ceilings). The distance between the product and the metal object should be  $\geq 15\text{cm}$  so as to avoid signal interference.

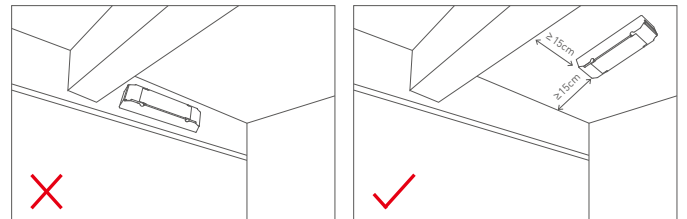


Please do not install the products on beams or near the corners. The distance between the product and the beam or the corner should be  $\geq 15\text{cm}$  so as to avoid signal interference.

## Relationship Diagrams


Efficiency vs Load

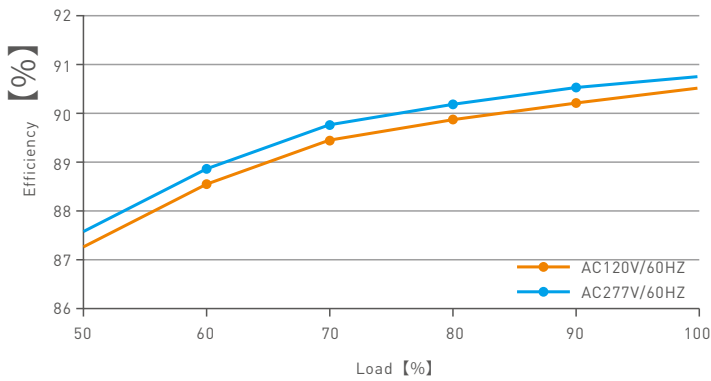


Power Factor Characteristic

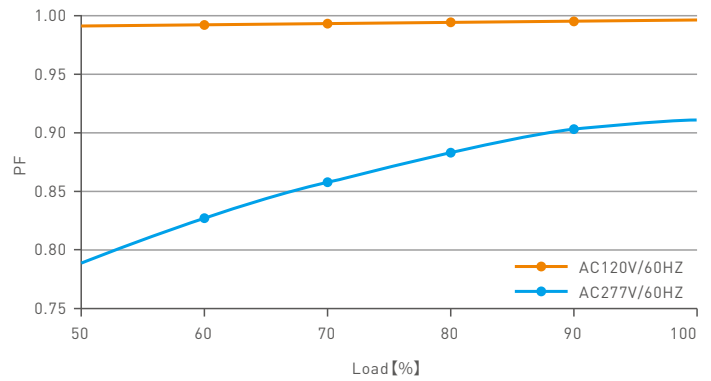

THD VS Load

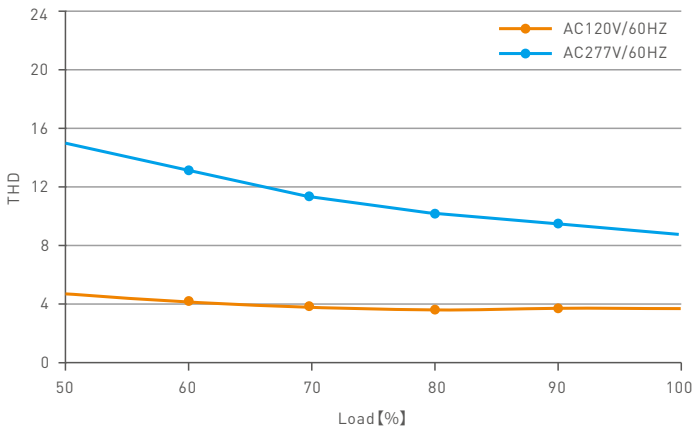

Over Load Diagram

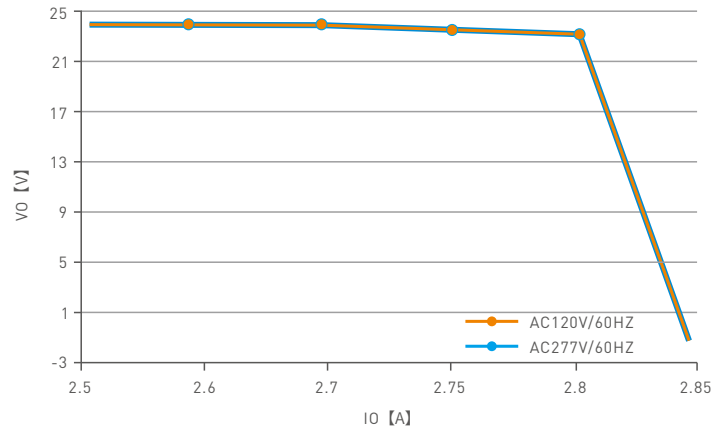


## Flicker Test Table

IEEE 1789


Limit Value of Modulation in Low Risk Areas	
Waveform frequency of optical output	Limit value (%)
$f \leq 8\text{Hz}$	0.2
$8\text{Hz} < f \leq 90\text{Hz}$	$0.025 \times f$
$90\text{Hz} < f \leq 1250\text{Hz}$	$0.08 \times f$
$f > 1250\text{Hz}$	Exemption assessment
Limit Value of Modulation in No Effect Areas	
Waveform frequency of optical output	Limit value (%)
$f \leq 10\text{Hz}$	0.1
$10\text{Hz} < f \leq 90\text{Hz}$	$0.01 \times f$
$90\text{Hz} < f \leq 3125\text{Hz}$	$[0.08/2.5] \times f$
$f > 3125\text{Hz}$	Exemption assessment (High frequency exemption)

Brightness

- ▲ 0.1 %
- ◆ 1 %
- ◆ 5 %
- ◆ 10 %
- 20 %
- ▲ 30 %
- 40 %
- ★ 50 %
- 60 %
- 70 %
- 80 %
- ★ 90 %
- ◆ 100 %

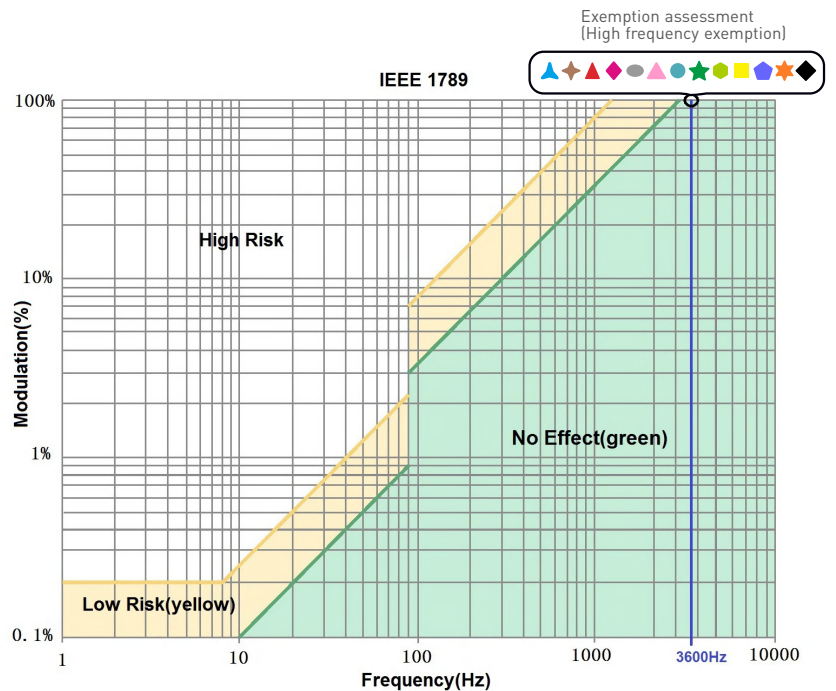


## System Diagram

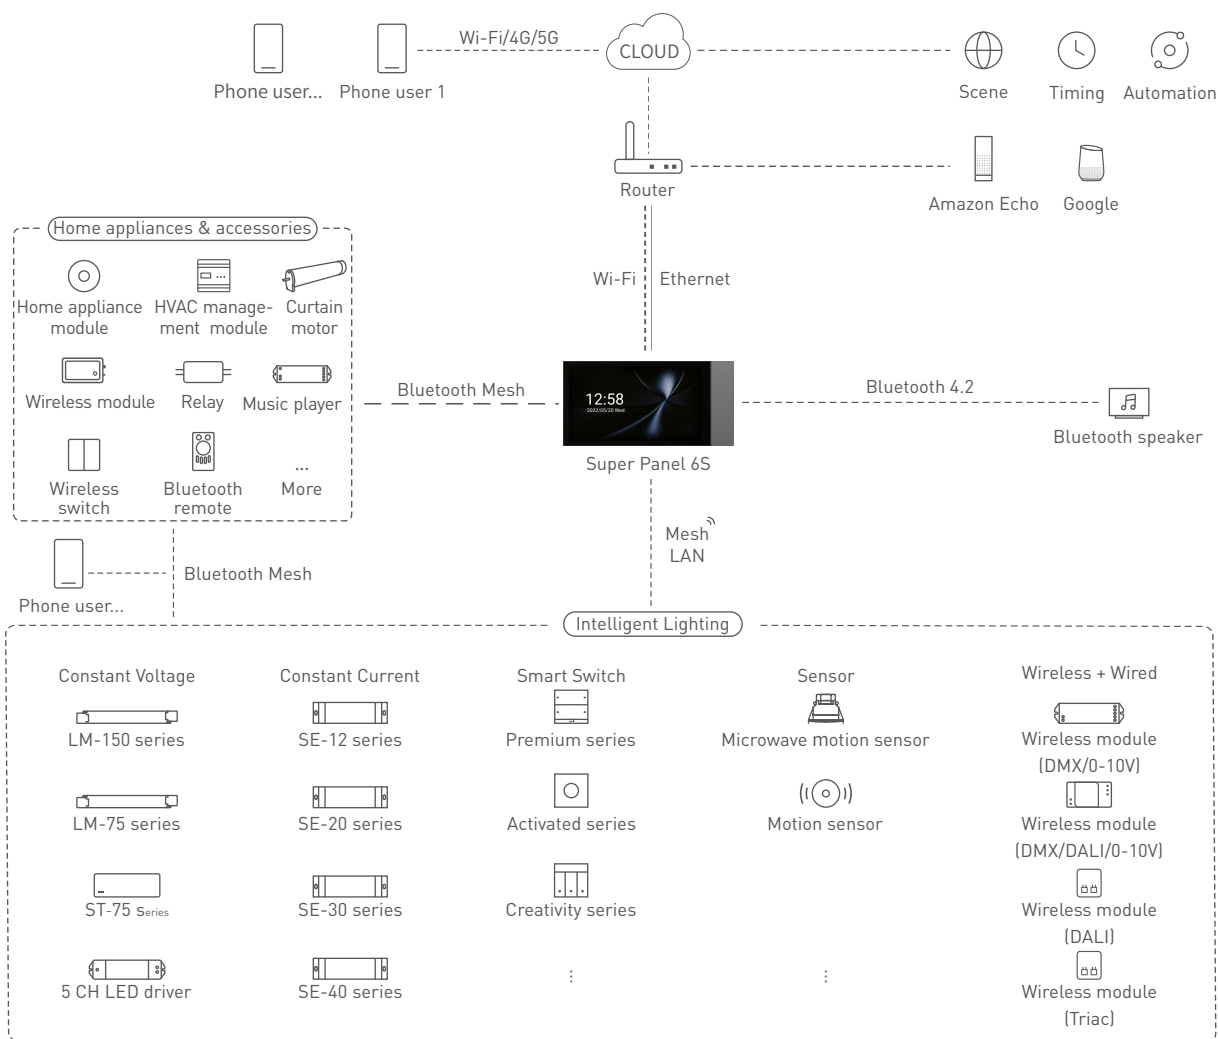


## Recommend Applications

1. Achieve fast dimming control.

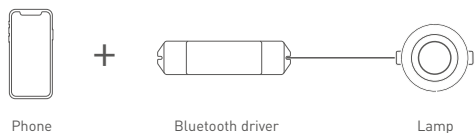

2. Both App and remote can control the driver after connecting the remote to the driver with App.

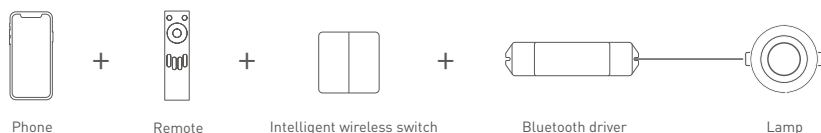

3. Both App and Super Panel 6S can control the driver simultaneously after connecting the Super Panel 6S to the driver with App. By connecting the Super Panel to network, you are allowed to control the driver, cloud scenes and automation remotely with App.



4. ....More applications of intelligent control are waiting for you to set up.

## App Operating Instructions

### 1. Register an account




The App is available on iOS or Android devices. Scan the QR code below with you mobile phone and follow the prompts to complete the App installation. Open the App to log in or register an account.



Scan and download the APP




### 2. Paring instructions

Open the APP and create a home if you are a new user. Click "+" icon in the upper right corner and access the "Add Device" list, then follow the prompts to add the device. Pick "Smart lighting-CT light" from the list and follow the prompts to power on the device firstly. Make sure the device is not connected to the network. Then click "Bluetooth Search" and follow the prompts to add the device.

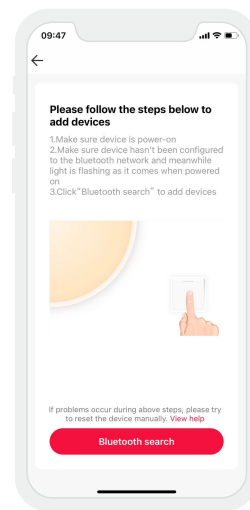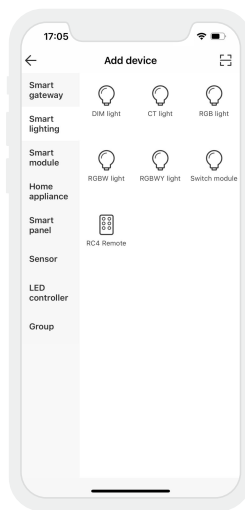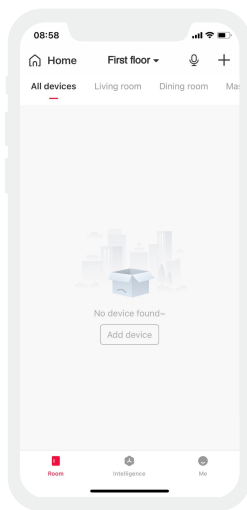


### 3. Control interface settings

After pairing up your device, go to the control interface. You'll be able to achieve your desired lighting effects by changing brightness and color temperature. Click "Theme" and you'll easily switch to multiple theme lighting effects with one tap. Click "Mode" and the App provides you editable advanced modes. Customize dynamic modes to put you into a more colorful life.

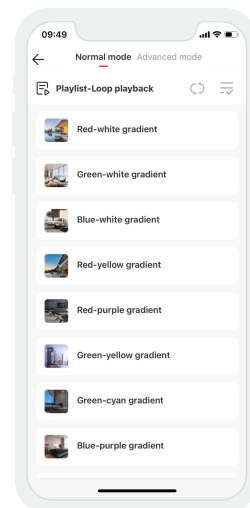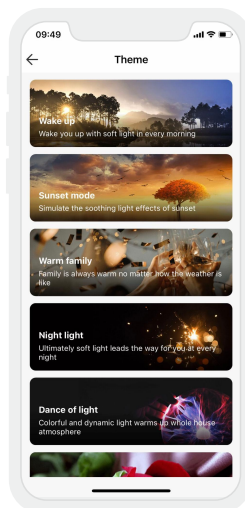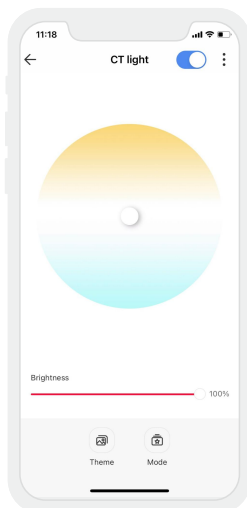


## 4. Light groups

Users are able to combine the same type of light fixtures into a group to control them simultaneously. Once you create the group, you can set the dim level and adjust the color temperature more easily. Pick "Group-CT light group" from the list. Follow the prompts to rename the group and click "Next" to pick the lights you are going to group together and click "Save".

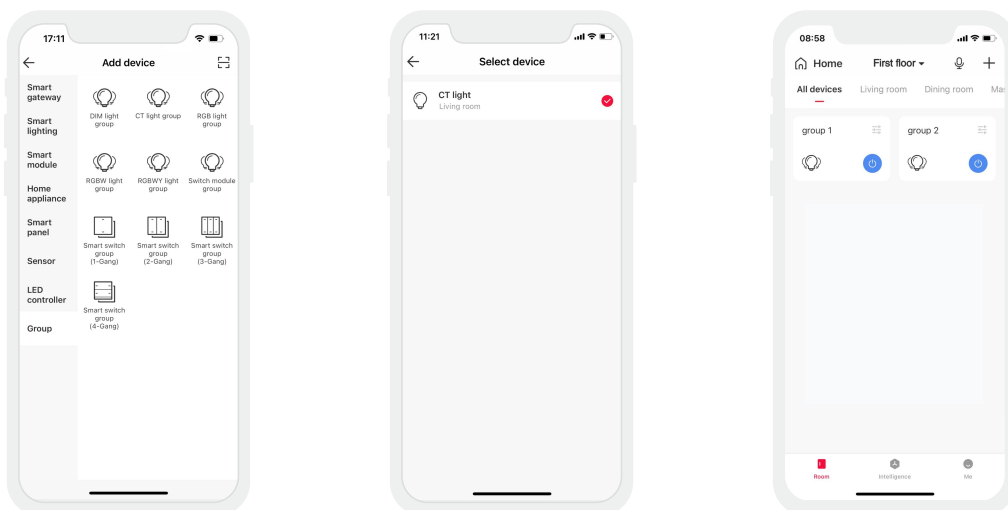


## 5. Advanced functions

This driver can be linked up with gateway function devices (such as Super Panel 6S) to achieve the advanced functions from local scenes and cloud scenes to automation.

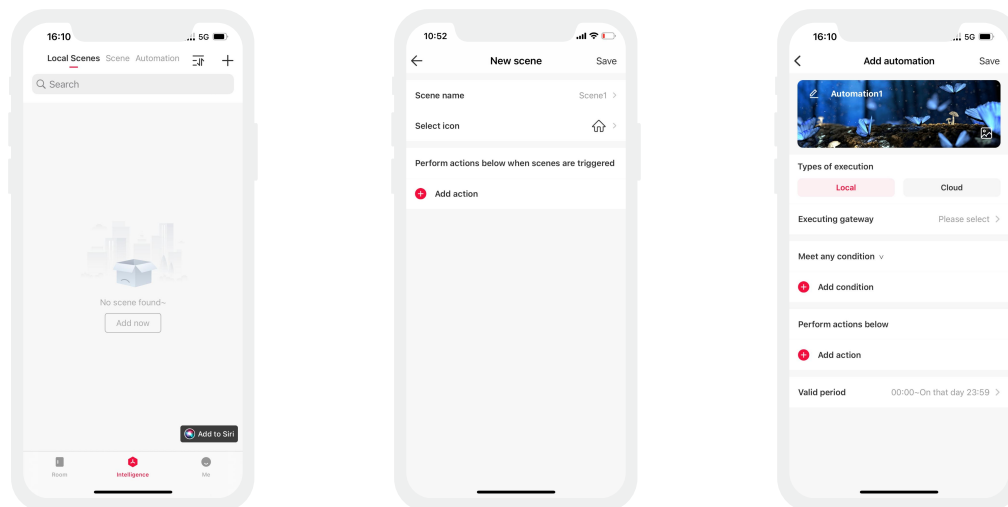

## Reset The Device (Reset to factory defaults)

Make sure the driver is well-connected to a lamp and the lamp is on, turn it off with the switch and after 15s turn it on. After 2s, turn it off again. Repeat the same operation 6 times. When the lamp flashes 5 times, reset the device to factory defaults successfully.




Under the driver being power-on



## Packaging Specifications

Model	LM-60-24-U2B2
Carton Dimensions	315×230×215mm(L×W×H)
Quantity	10PCS/Layer; 3Layer/Carton; 30PCS/Carton
Weight	0.285kg/PC; 9.35kg±5%/Carton

## Packaging Image

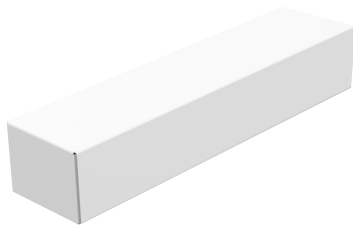

Inner Packaging Box



Carton Packaging

## Transportation and Storage

### 1. Transportation

Products can be shipped via vehicles, boats and planes.

During transportation, products should be protected from rain and sun. Please avoid severe shock and vibration during the loading and unloading process.

### 2. Storage

The storage conditions should comply with the Class I Environmental Standards. The products that have been stored for more than six months are recommended to be re-inspected and can be used only after they have been qualified.

## Attentions

- This product must be installed and adjusted by a qualified professional.
  - This product is non-waterproof (special models excepted). Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
  - Good heat dissipation will extend the life the product. Please install the product in a environment with good ventilation.
  - When you install this product, please avoid being near a large area of metal objects or stacking them to prevent signal interference.
  - Please keep the product away from a intense magnetic field, a high pressure area or a place where lightning is easy to occur.
  - Please check whether the working voltage used complies with the parameter requirements of the product.
  - Before you power on the product, please make sure all the wiring is correct in case of incorrect connection that may cause a short circuit and damage the components, or trigger a accident.
  - If a fault occurs, please do not attempt to fix the product by yourself. If you have any question, please contact the supplier.
- \* This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our official distributors if you have any question.

## Warranty Agreement

- Warranty periods from the date of delivery: 5 years.
- Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
- Any artificial damage caused by high voltage, overload, or improper operations.
- Products with severe physical damage.
- Damage caused by natural disasters and force majeure.
- Warranty labels and barcodes have been damaged.
- No any contract signed by LTECH.

1. Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
2. LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.